

IES Report




DoubleBox™ | 107 | 120° Batwing, up | 60° Symmetric, down | 80 CRI | LO

107-DB-XX-4-48-XX-XX-XX-XX-X-X-Z-LO-35-G1S2-X-AL / WH-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	77	79	81	82
Total Lumens, 4' rail length (1219mm)	2276	2348	2396	2444
Lumens per foot (305mm)	569	587	599	611
Lumens per foot UP (305mm)	372	383	391	399
Lumens per foot DOWN (305mm)	198	204	208	212
Input Power (W), 4' rail length (1219mm)	29.9	29.9	29.9	29.9
Watts per foot (305mm)	7.5	7.5	7.5	7.5
CRI	85	85	85	85

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

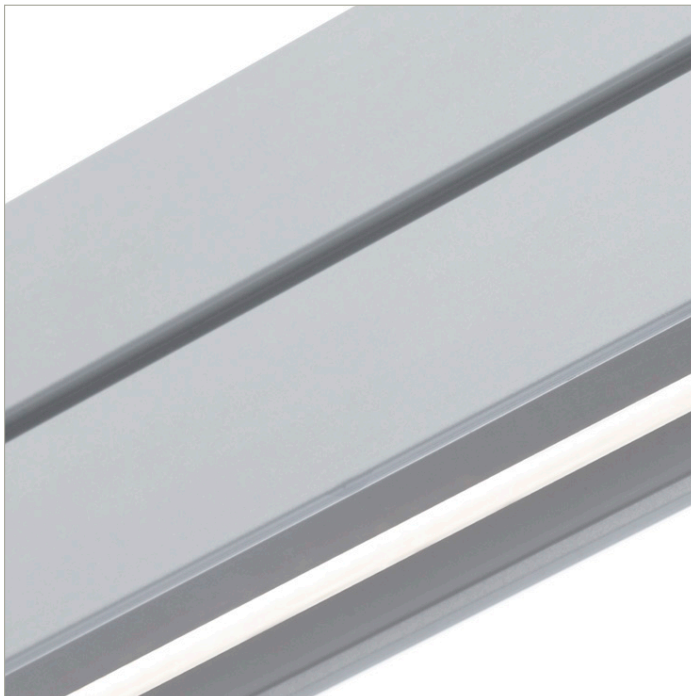

IES Report




DoubleBox™ | 107 | 120° Batwing, up | 60° Symmetric, down | 80 CRI | SO

107-DB-XX-4-48-XX-XX-XX-X-X-Z-SO-35-G1S2-X-AL / WH-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	95	98	100	102
Total Lumens, 4' rail length (1219mm)	4552	4696	4792	4887
Lumens per foot (305mm)	1138	1174	1198	1222
Lumens per foot UP (305mm)	743	766	782	798
Lumens per foot DOWN (305mm)	395	408	416	424
Input Power (W), 4' rail length (1219mm)	48.1	48.1	48.1	48.1
Watts per foot (305mm)	12.1	12.1	12.1	12.1
CRI	85	85	85	85

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

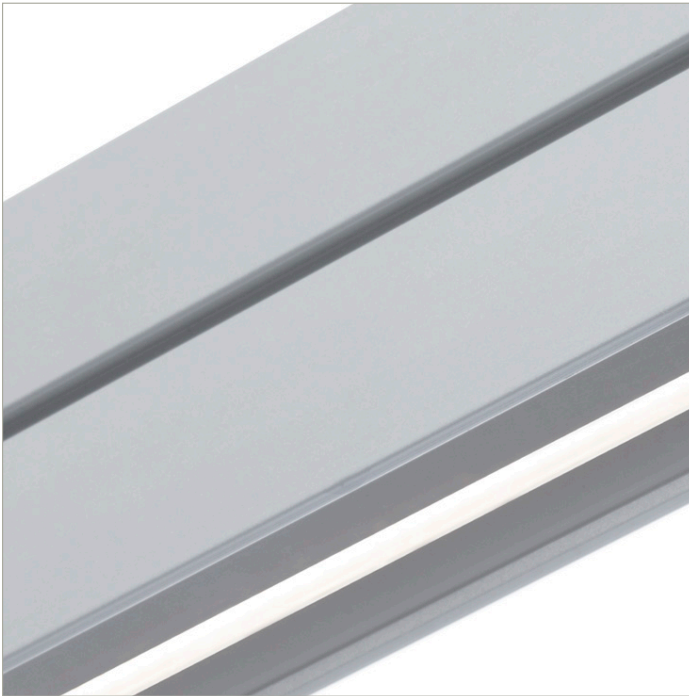

IES Report



DoubleBox™ | 107 | 120° Batwing, up | 60° Symmetric, down | 80 CRI | HO

107-DB-XX-4-48-XX-XX-XX-XX-X-X-Z-HO-35-G1S2-X-AL / WH-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	88	91	93	95
Total Lumens, 4' rail length (1219mm)	8649	8922	9104	9286
Lumens per foot (305mm)	2162	2231	2276	2322
Lumens per foot UP (305mm)	1412	1456	1486	1516
Lumens per foot DOWN (305mm)	751	775	790	806
Input Power (W), 4' rail length (1219mm)	98.4	98.4	98.4	98.4
Watts per foot (305mm)	24.7	24.7	24.7	24.7
CRI	85	85	85	85

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).



IES Report




DoubleBox™ | 107 | 120° Batwing, up | 60° Symmetric, down | 90 CRI | LO

107-DB-XX-4-48-XX-XX-XX-XX-X-X-Z-LO-359-G1S2-X-AL / WH-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	66	68	70	71
Total Lumens, 4' rail length (1219mm)	1962	2024	2065	2107
Lumens per foot (305mm)	491	506	516	527
Lumens per foot UP (305mm)	320	330	337	344
Lumens per foot DOWN (305mm)	170	176	179	183
Input Power (W), 4' rail length (1219mm)	29.9	29.9	29.9	29.9
Watts per foot (305mm)	7.5	7.5	7.5	7.5
CRI	96	96	96	96

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

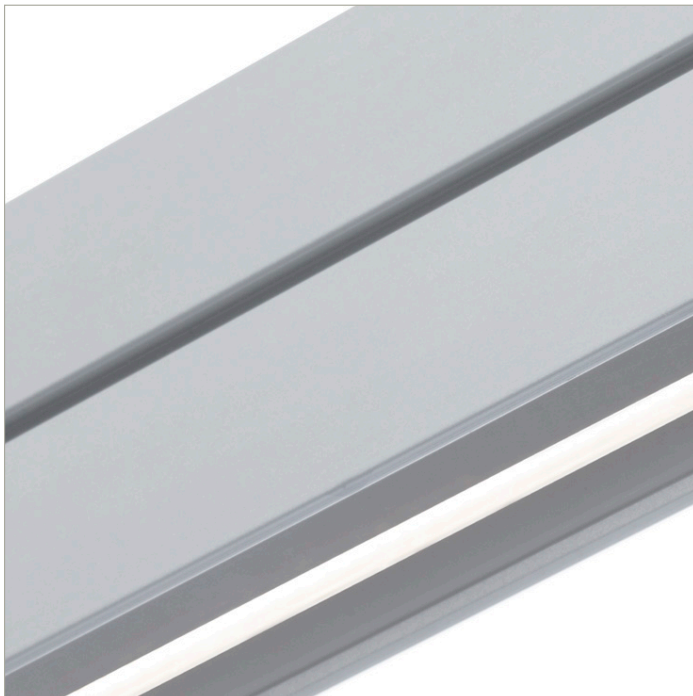

IES Report




DoubleBox™ | 107 | 120° Batwing, up | 60° Symmetric, down | 90 CRI |SO

107-DB-XX-4-48-XX-XX-XX-XX-X-X-Z-SO-359-G1S2-X-AL / WH-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	82	85	86	88
Total Lumens, 4' rail length (1219mm)	3924	4048	4131	4213
Lumens per foot (305mm)	981	1012	1033	1053
Lumens per foot UP (305mm)	641	661	674	688
Lumens per foot DOWN (305mm)	341	352	359	366
Input Power (W), 4' rail length (1219mm)	48.15	48.15	48.15	48.15
Watts per foot (305mm)	12.1	12.1	12.1	12.1
CRI	96	96	96	96

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

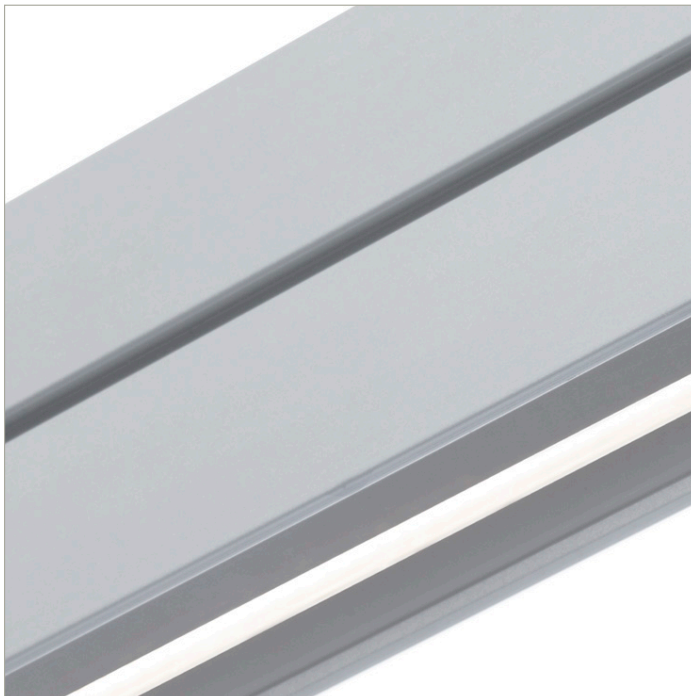

IES Report

DoubleBox™ | 107 | 120° Batwing, up | 60° Symmetric, down | 90 CRI | HO

107-DB-XX-4-48-XX-XX-XX-XX-X-X-Z-HO-359-G1S2-X-AL / WH-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	76	79	80	82
Total Lumens, 4' rail length (1219mm)	7456	7691	7848	8005
Lumens per foot (305mm)	1864	1923	1962	2001
Lumens per foot UP (305mm)	1217	1255	1281	1307
Lumens per foot DOWN (305mm)	647	668	681	695
Input Power (W), 4' rail length (1219mm)	98.44	98.44	98.44	98.44
Watts per foot (305mm)	24.7	24.7	24.7	24.7
CRI	96	96	96	96

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).