

## IES Report




DoubleBox™ | 107 | 120° Batwing, up | 85° Asymmetric, down | 80 CRI | LO

107-DB-XX-4-48-XX-XX-XX-XX-X-X-Z-LO-35-G1A1-X-AL / WH-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	76	78	80	81
Total Lumens, 4' rail length (1219mm)	2250	2321	2369	2416
Lumens per foot (305mm)	563	580	592	604
Lumens per foot UP (305mm)	369	381	389	397
Lumens per foot DOWN (305mm)	193	200	204	208
Input Power (W), 4' rail length (1219mm)	29.9	29.9	29.9	29.9
Watts per foot (305mm)	7.5	7.5	7.5	7.5
CRI	85	85	85	85

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

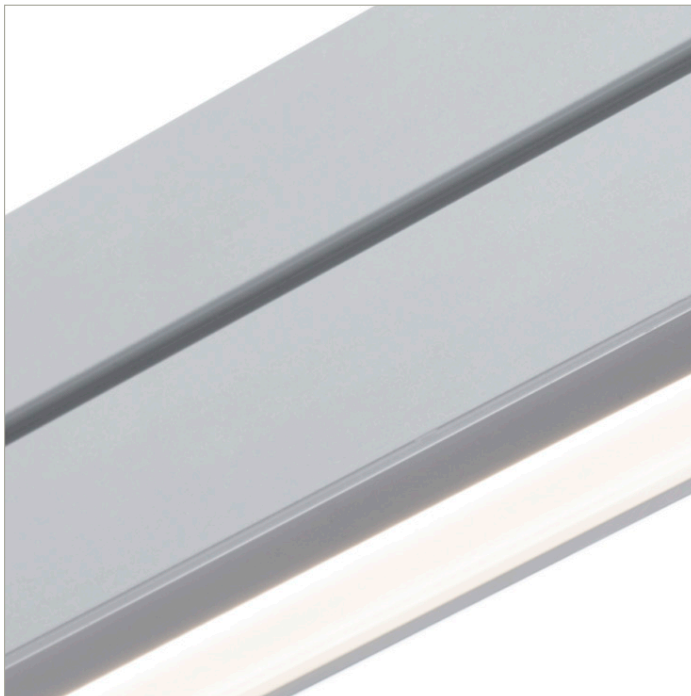

## IES Report




**DoubleBox™ | 107 | 120° Batwing, up | 85° Asymmetric, down | 80 CRI | SO**

**107-DB-XX-4-48-XX-XX-XX-XX-X-X-Z-SO-35-G1A1-X-AL / WH-X**

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	94	97	99	101
Total Lumens, 4' rail length (1219mm)	4501	4643	4738	4832
Lumens per foot (305mm)	1125	1161	1184	1208
Lumens per foot UP (305mm)	739	762	777	793
Lumens per foot DOWN (305mm)	387	399	407	415
Input Power (W), 4' rail length (1219mm)	48.1	48.1	48.1	48.1
Watts per foot (305mm)	12.1	12.1	12.1	12.1
CRI	85	85	85	85

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

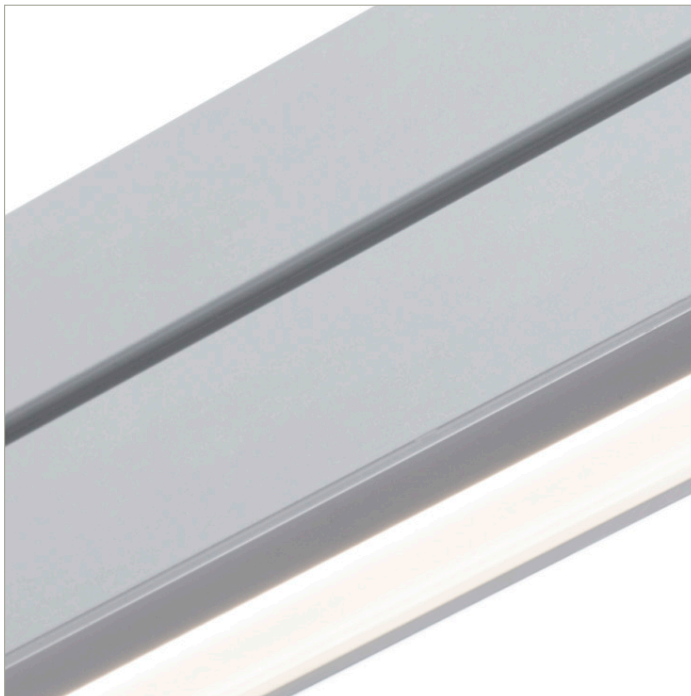

## IES Report




DoubleBox™ | 107 | 120° Batwing, up | 85° Asymmetric, down | 80 CRI | HO

107-DB-XX-4-48-XX-XX-XX-XX-X-X-Z-HO-35-G1A1-X-AL / WH-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	87	90	92	94
Total Lumens, 4' rail length (1219mm)	8551	8821	9001	9181
Lumens per foot (305mm)	2138	2205	2250	2295
Lumens per foot UP (305mm)	1403	1448	1477	1507
Lumens per foot DOWN (305mm)	735	758	773	789
Input Power (W), 4' rail length (1219mm)	98.4	98.4	98.4	98.4
Watts per foot (305mm)	24.7	24.7	24.7	24.7
CRI	85	85	85	85

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

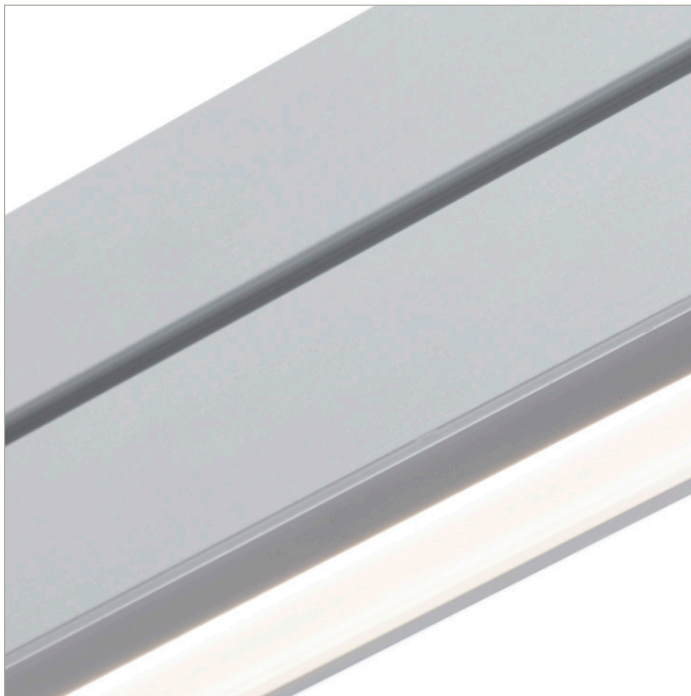

## IES Report




**DoubleBox™ | 107 | 120° Batwing, up | 85° Asymmetric, down | 90 CRI | LO**

**107-DB-XX-4-48-XX-XX-XX-XX-X-X-Z-LO-359-G1A1-X-AL / WH-X**

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	65	67	69	70
Total Lumens, 4' rail length (1219mm)	1940	2001	2042	2083
Lumens per foot (305mm)	485	500	511	521
Lumens per foot UP (305mm)	318	328	335	342
Lumens per foot DOWN (305mm)	167	172	176	179
Input Power (W), 4' rail length (1219mm)	29.9	29.9	29.9	29.9
Watts per foot (305mm)	7.5	7.5	7.5	7.5
CRI	96	96	96	96

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

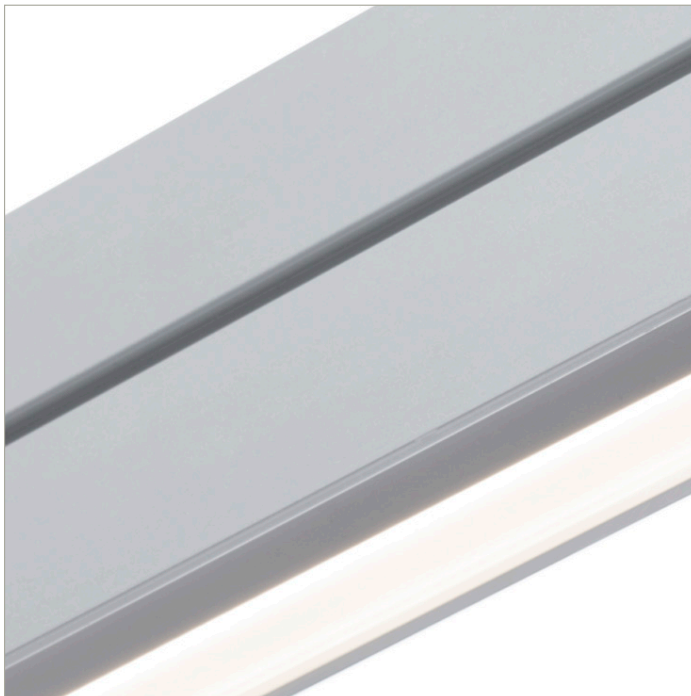

## IES Report




**DoubleBox™ | 107 | 120° Batwing, up | 85° Asymmetric, down | 90 CRI | SO**

**107-DB-XX-4-48-XX-XX-XX-XX-X-X-Z-SO-359-G1A1-X-AL / WH-X**

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	81	84	85	87
Total Lumens, 4' rail length (1219mm)	3880	4002	4084	4166
Lumens per foot (305mm)	970	1001	1021	1041
Lumens per foot UP (305mm)	637	657	670	684
Lumens per foot DOWN (305mm)	333	344	351	358
Input Power (W), 4' rail length (1219mm)	48.15	48.15	48.15	48.15
Watts per foot (305mm)	12.1	12.1	12.1	12.1
CRI	96	96	96	96

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

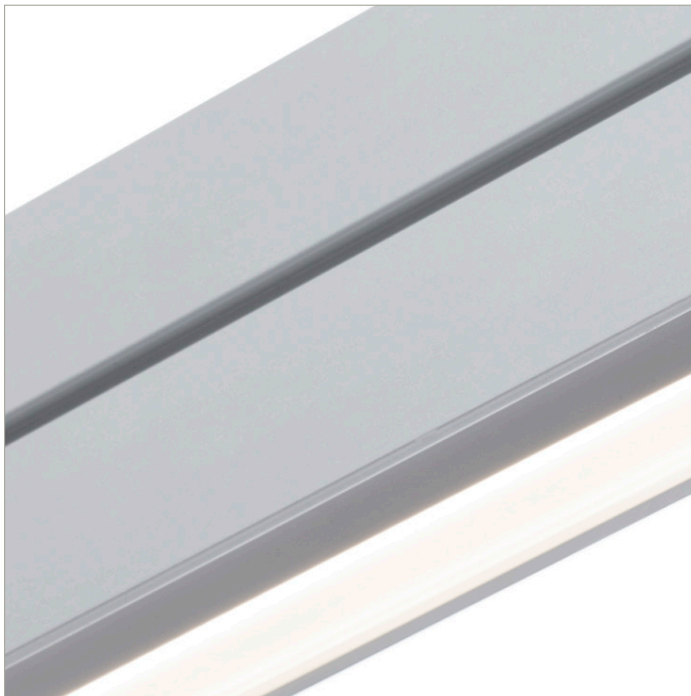

## IES Report

DoubleBox™ | 107 | 120° Batwing, up | 85° Asymmetric, down | 90 CRI | HO

107-DB-XX-4-48-XX-XX-XX-XX-X-X-Z-HO-359-G1A1-X-AL / WH-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	75	78	79	81
Total Lumens, 4' rail length (1219mm)	7372	7605	7760	7915
Lumens per foot (305mm)	1843	1901	1940	1979
Lumens per foot UP (305mm)	1210	1248	1273	1299
Lumens per foot DOWN (305mm)	633	653	667	680
Input Power (W), 4' rail length (1219mm)	98.44	98.44	98.44	98.44
Watts per foot (305mm)	24.7	24.7	24.7	24.7
CRI	96	96	96	96

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).