

IES Report



WingRail® | 107 | Clear with EdgeSoft™ | 80 CRI | LO

107-WG-XX-4-48-XX-XX-XX-XX-X-X-Z-LO-35-C1-X-XX-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	91	94	96	97
Total Lumens, 4' rail length (1219mm)	1349	1392	1420	1449
Lumens per foot (305mm)	337	348	355	362
Input Power (W), 4' rail length (1219mm)	15.0	15.0	15.0	15.0
Watts per foot (305mm)	3.8	3.8	3.8	3.8
CRI	85	85	85	85

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).



IES Report




WingRail® | 107 | Clear with EdgeSoft™ | 80 CRI | SO

107-WG-XX-4-48-XX-XX-XX-XX-X-X-Z-SO-35-C1-X-XX-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	112	116	118	121
Total Lumens, 4' rail length (1219mm)	2699	2784	2841	2898
Lumens per foot (305mm)	675	696	710	724
Input Power (W), 4' rail length (1219mm)	24.1	24.1	24.1	24.1
Watts per foot (305mm)	6.1	6.1	6.1	6.1
CRI	85	85	85	85

Due to the large number of options in Vode’s product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

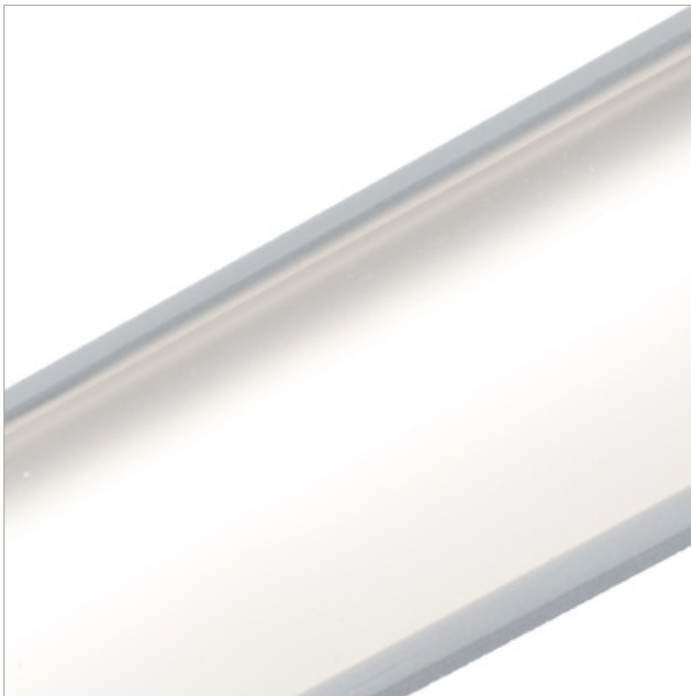

IES Report



WingRail® | 107 | Clear with EdgeSoft™ | 80 CRI | HO

107-WG-XX-4-48-XX-XX-XX-XX-X-X-Z-HO-35-C1-X-XX-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	105	108	110	112
Total Lumens, 4' rail length (1219mm)	5128	5290	5398	5505
Lumens per foot (305mm)	1282	1322	1349	1376
Input Power (W), 4' rail length (1219mm)	49.2	49.2	49.2	49.2
Watts per foot (305mm)	12.4	12.4	12.4	12.4
CRI	85	85	85	85

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).



IES Report




WingRail® | 107 | Clear with EdgeSoft™ | 90 CRI | LO

107-WG-XX-4-48-XX-XX-XX-XX-X-X-Z-LO-359-C1-X-XX-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	78	81	82	84
Total Lumens, 4' rail length (1219mm)	1163	1200	1224	1249
Lumens per foot (305mm)	291	300	306	312
Input Power (W), 4' rail length (1219mm)	15.0	15.0	15.0	15.0
Watts per foot (305mm)	3.8	3.8	3.8	3.8
CRI	96	96	96	96

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

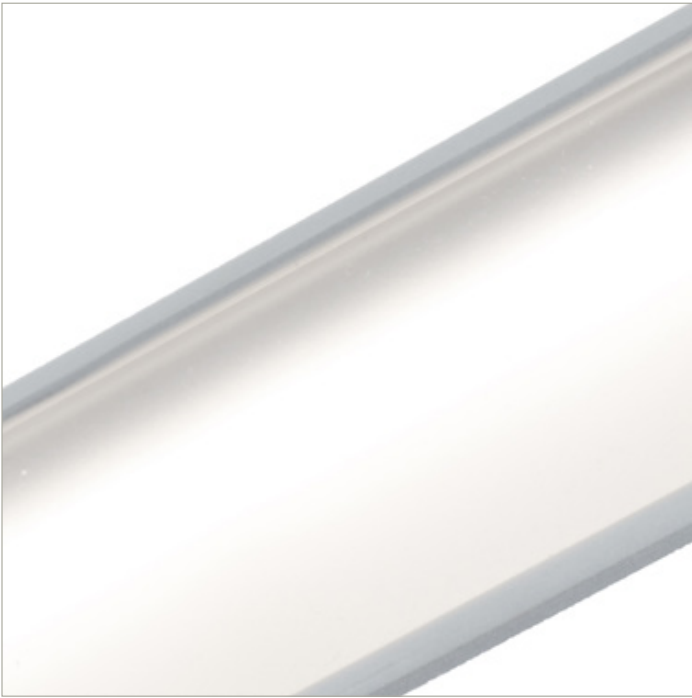

IES Report




WingRail® | 107 | Clear with EdgeSoft™ | 90 CRI | SO

107-WG-XX-4-48-XX-XX-XX-XX-X-X-Z-SO-359-C1-X-XX-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	97	100	102	104
Total Lumens, 4' rail length (1219mm)	2327	2400	2449	2498
Lumens per foot (305mm)	582	600	612	624
Input Power (W), 4' rail length (1219mm)	24.1	24.1	24.1	24.1
Watts per foot (305mm)	6.1	6.1	6.1	6.1
CRI	96	96	96	96

Due to the large number of options in Vode’s product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

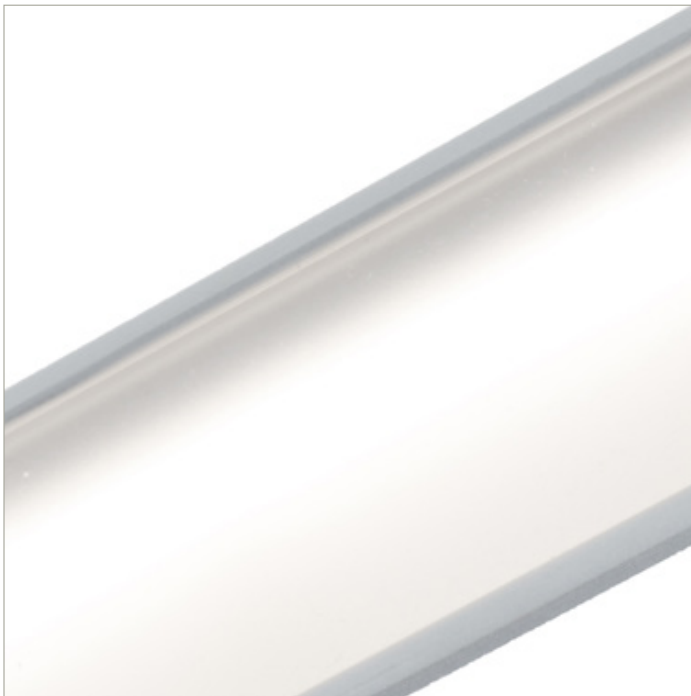

IES Report

WingRail® | 107 | Clear with EdgeSoft™ | 90 CRI | HO

107-WG-XX-4-48-XX-XX-XX-XX-X-X-Z-HO-359-C1-X-XX-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	90	93	95	97
Total Lumens, 4' rail length (1219mm)	4420	4560	4653	4746
Lumens per foot (305mm)	1105	1140	1163	1187
Input Power (W), 4' rail length (1219mm)	49.2	49.2	49.2	49.2
Watts per foot (305mm)	12.4	12.4	12.4	12.4
CRI	96	96	96	96

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).