

IES Report




WingRail® | 107 | Black Baffle with EdgeSoft™ | 80 CRI | LO

107-WG-XX-4-48-XX-XX-XX-XX-X-X-Z-LO-35-BB-X-XX-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	46	48	48	49
Total Lumens, 4' rail length (1219mm)	681	703	717	731
Lumens per foot (305mm)	170	176	179	183
Input Power (W), 4' rail length (1219mm)	15.0	15.0	15.0	15.0
Watts per foot (305mm)	3.8	3.8	3.8	3.8
CRI	85	85	85	85

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

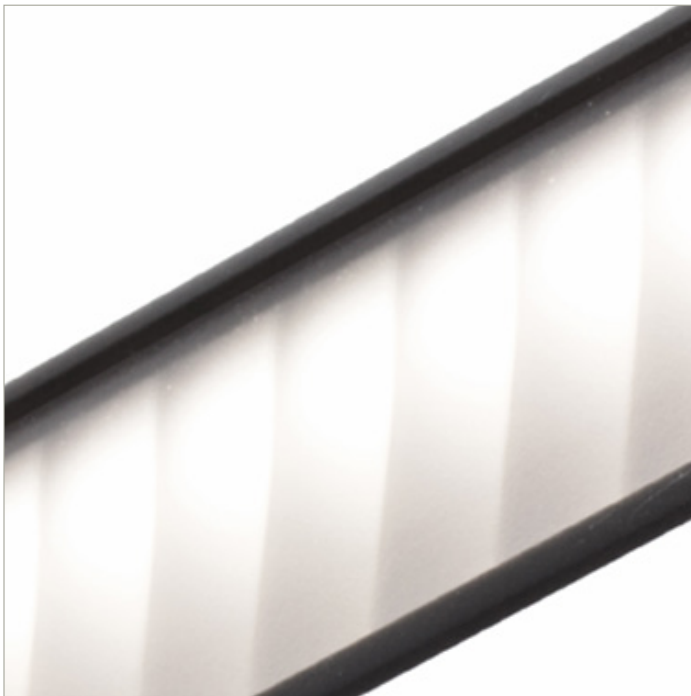

IES Report




WingRail® | 107 | Black Baffle with EdgeSoft™ | 80 CRI | SO

107-WG-XX-4-48-XX-XX-XX-XX-X-X-Z-SO-35-BB-X-XX-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	57	59	60	61
Total Lumens, 4' rail length (1219mm)	1362	1405	1434	1463
Lumens per foot (305mm)	341	351	359	366
Input Power (W), 4' rail length (1219mm)	24.1	24.1	24.1	24.1
Watts per foot (305mm)	6.1	6.1	6.1	6.1
CRI	85	85	85	85

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

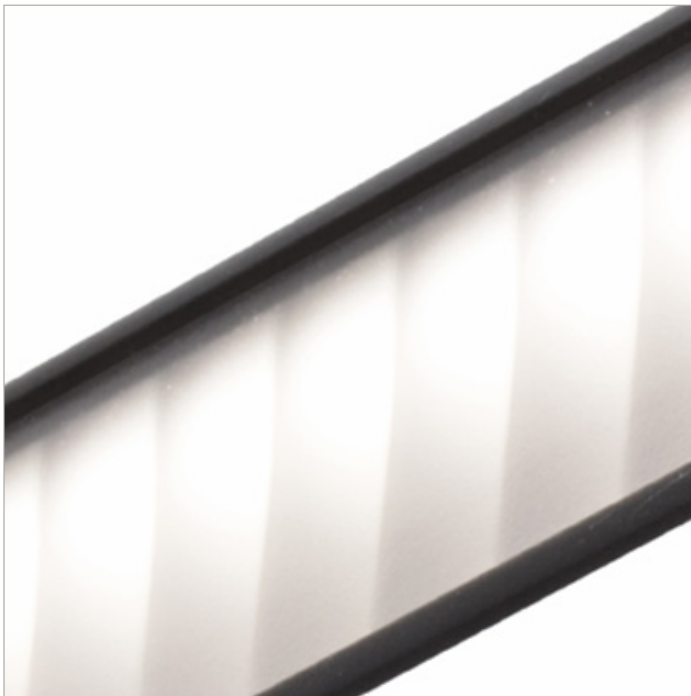

IES Report




WingRail® | 107 | Black Baffle with EdgeSoft™ | 80 CRI | HO

107-WG-XX-4-48-XX-XX-XX-XX-X-X-Z-HO-35-BB-X-XX-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	53	55	56	57
Total Lumens, 4' rail length (1219mm)	2589	2670	2725	2779
Lumens per foot (305mm)	647	668	681	695
Input Power (W), 4' rail length (1219mm)	49.2	49.2	49.2	49.2
Watts per foot (305mm)	12.4	12.4	12.4	12.4
CRI	85	85	85	85

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

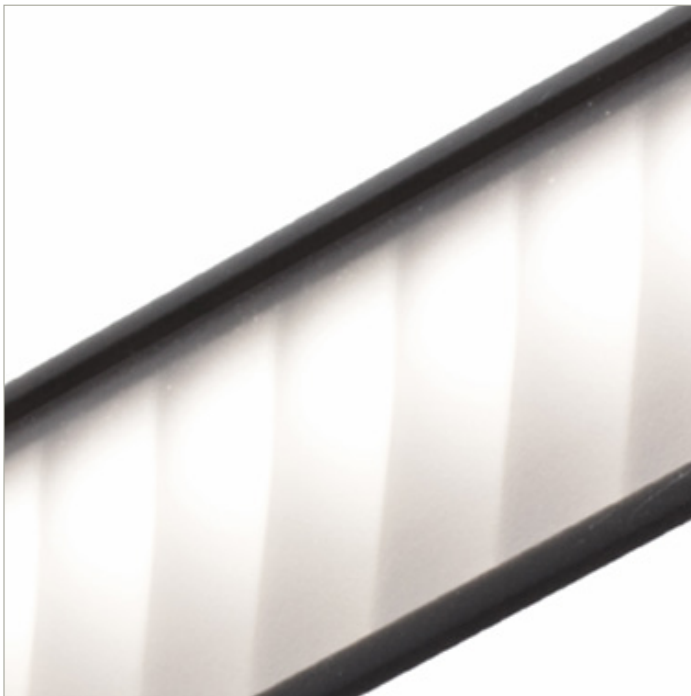

IES Report




WingRail® | 107 | Black Baffle with EdgeSoft™ | 90 CRI | LO

107-WG-XX-4-48-XX-XX-XX-XX-X-X-Z-LO-359-BB-X-XX-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	40	41	42	43
Total Lumens, 4' rail length (1219mm)	587	606	618	631
Lumens per foot (305mm)	147	151	155	158
Input Power (W), 4' rail length (1219mm)	15.0	15.0	15.0	15.0
Watts per foot (305mm)	3.8	3.8	3.8	3.8
CRI	96	96	96	96

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

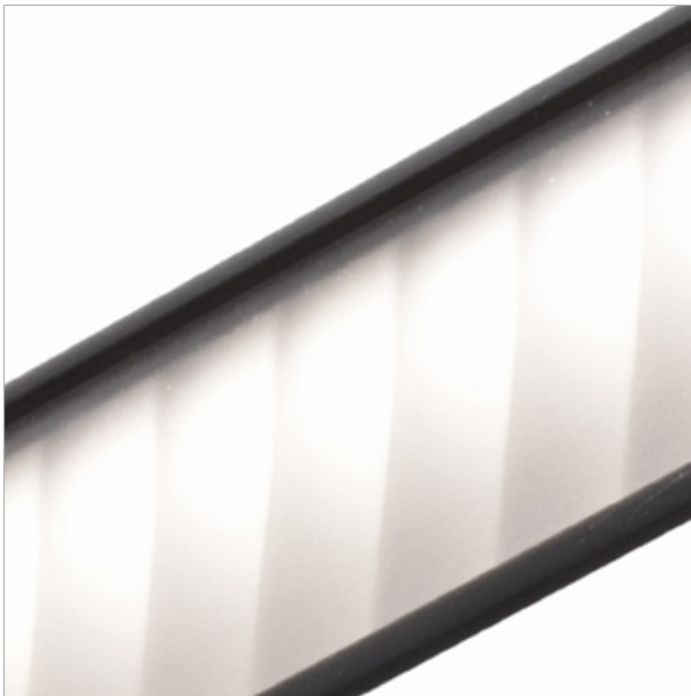

IES Report




WingRail® | 107 | Black Baffle with EdgeSoft™ | 90 CRI | SO

107-WG-XX-4-48-XX-XX-XX-XX-X-X-Z-SO-359-BB-X-XX-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	49	51	52	53
Total Lumens, 4' rail length (1219mm)	1175	1212	1236	1261
Lumens per foot (305mm)	294	303	309	315
Input Power (W), 4' rail length (1219mm)	24.1	24.1	24.1	24.1
Watts per foot (305mm)	6.1	6.1	6.1	6.1
CRI	96	96	96	96

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

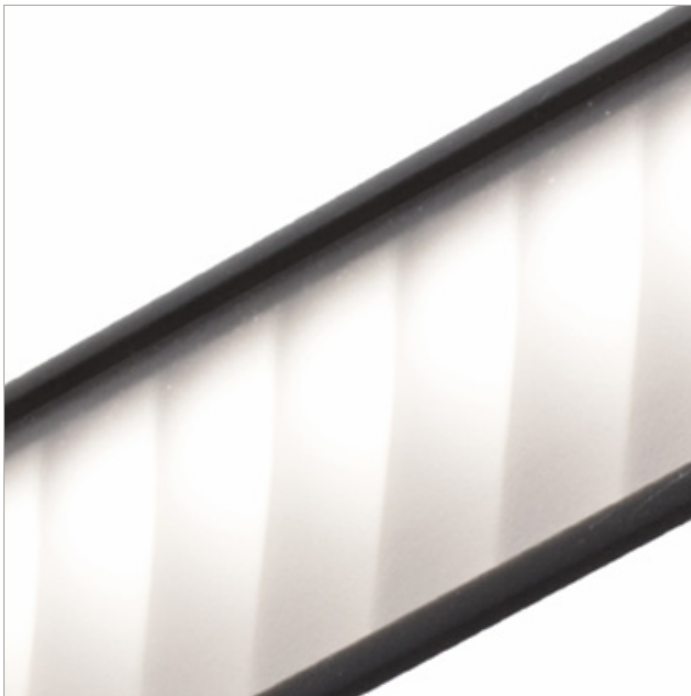

IES Report

WingRail® | 107 | Black Baffle with EdgeSoft™ | 90 CRI | HO

107-WG-XX-4-48-XX-XX-XX-XX-X-X-Z-HO-359-BB-X-XX-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	46	47	48	49
Total Lumens, 4' rail length (1219mm)	2232	2302	2349	2396
Lumens per foot (305mm)	558	576	587	599
Input Power (W), 4' rail length (1219mm)	49.2	49.2	49.2	49.2
Watts per foot (305mm)	12.4	12.4	12.4	12.4
CRI	96	96	96	96

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).