

## IES Report




### ZipThree® | Ceiling Cable | 707 | Symmetric, up | 40° Symmetric, down | 80 CRI | LO

707-Z3-XX-4-48-CC-XX-XX-XX-X-0-Z-LO-35-U1S1-0-BL-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	73	76	77	79
Total Lumens, 4' rail length (1219mm)	2249	2320	2367	2414
Lumens per foot (305mm)	562	580	592	604
Lumens per foot UP (305mm)	411	424	432	441
Lumens per foot DOWN (305mm)	152	156	160	163
Input Power (W), 4' rail length (1219mm)	30.8	30.8	30.8	30.8
Watts per foot (305mm)	7.8	7.8	7.8	7.8
CRI	85	85	85	85

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](http://vode.com).

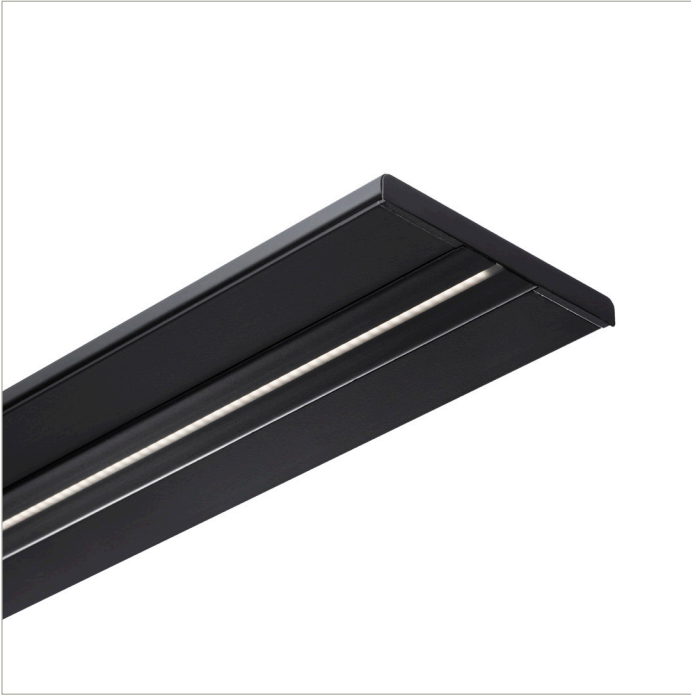

## IES Report




ZipThree® | Ceiling Cable | 707 | Symmetric, up | 40° Symmetric, down | 80 CRI | SO

707-Z3-XX-4-48-CC-XX-XX-XX-X-0-Z-SO-35-U1S1-0-BL-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	88	91	93	95
Total Lumens, 4' rail length (1219mm)	4498	4640	4734	4829
Lumens per foot (305mm)	1124	1160	1184	1207
Lumens per foot UP (305mm)	821	847	864	882
Lumens per foot DOWN (305mm)	303	313	319	326
Input Power (W), 4' rail length (1219mm)	51.3	51.3	51.3	51.3
Watts per foot (305mm)	12.9	12.9	12.9	12.9
CRI	85	85	85	85

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

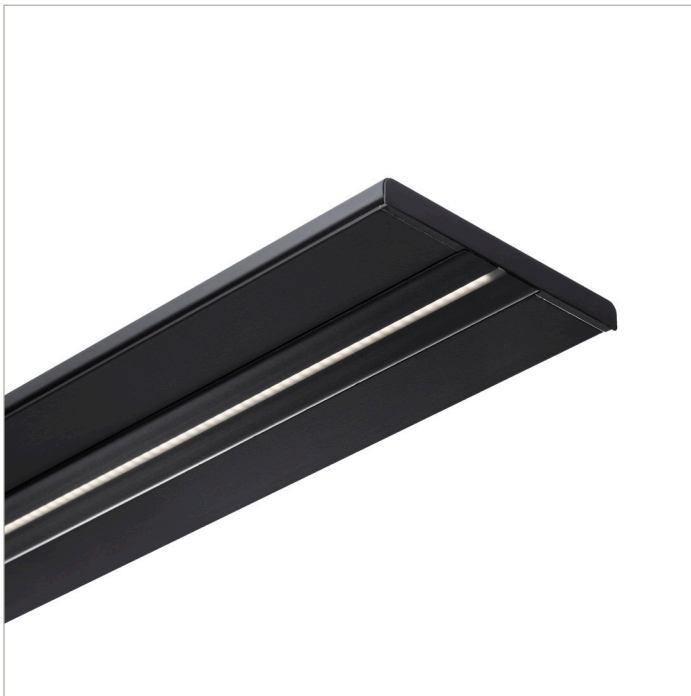

## IES Report




ZipThree® | Ceiling Cable | 707 | Symmetric, up | 40° Symmetric, down | 80 CRI | HO

707-Z3-XX-4-48-CC-XX-XX-XX-X-0-Z-HO-35-U1S1-0-BL-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	80	83	84	86
Total Lumens, 4' rail length (1219mm)	8545	8815	8995	9175
Lumens per foot (305mm)	2136	2204	2249	2294
Lumens per foot UP (305mm)	1560	1609	1642	1591
Lumens per foot DOWN (305mm)	576	594	606	588
Input Power (W), 4' rail length (1219mm)	107.2	107.2	107.2	107.2
Watts per foot (305mm)	26.8	26.8	26.8	26.8
CRI	85	85	85	85

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](http://vode.com).

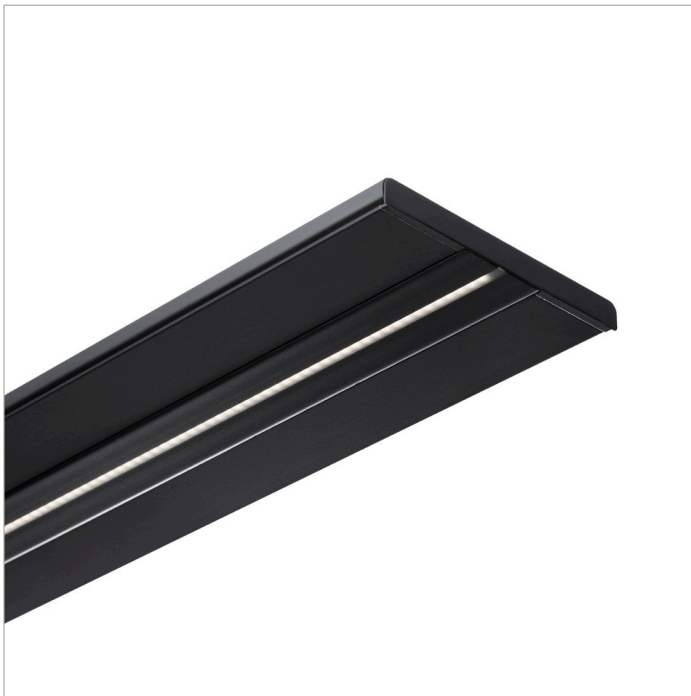

## IES Report




### ZipThree® | Ceiling Cable | 707 | Symmetric, up | 40° Symmetric, down | 90 CRI | LO

707-Z3-XX-4-48-CC-XX-XX-XX-X-0-Z-LO-359-U1S1-0-BL-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	63	65	67	70
Total Lumens, 4' rail length (1219mm)	1939	2000	2041	2081
Lumens per foot (305mm)	485	500	510	520
Lumens per foot UP (305mm)	354	365	373	380
Lumens per foot DOWN (305mm)	131	135	138	140
Input Power (W), 4' rail length (1219mm)	30.8	30.8	30.8	30.8
Watts per foot (305mm)	7.8	7.8	7.8	7.8
CRI*	96	96	96	96

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](http://vode.com).

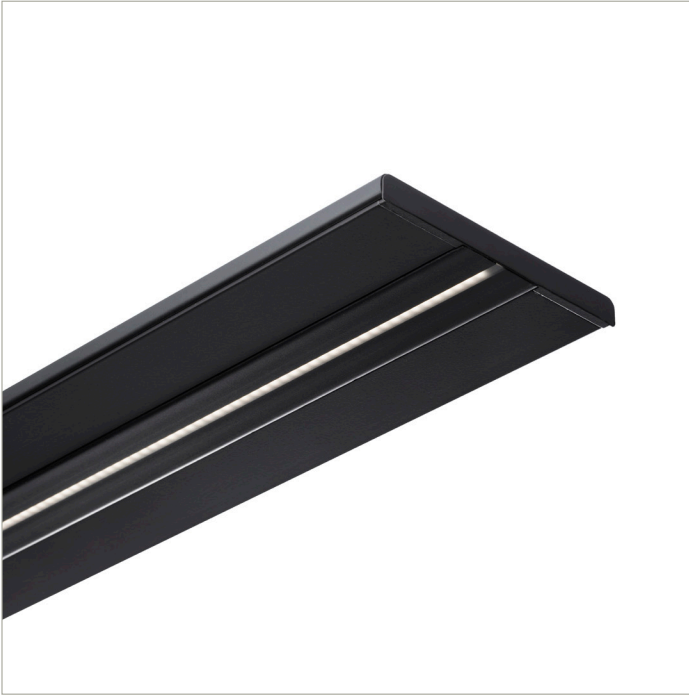

## IES Report




ZipThree® | Ceiling Cable | 707 | Symmetric, up | 40° Symmetric, down | 90 CRI | SO

707-Z3-XX-4-48-CC-XX-XX-XX-X-0-Z-SO-359-U1S1-0-BL-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	76	78	80	83
Total Lumens, 4' rail length (1219mm)	3877	4000	4081	4163
Lumens per foot (305mm)	969	1000	1020	1041
Lumens per foot UP (305mm)	708	730	745	760
Lumens per foot DOWN (305mm)	261	270	275	281
Input Power (W), 4' rail length (1219mm)	51.3	51.3	51.3	51.3
Watts per foot (305mm)	12.9	12.9	12.9	12.9
CRI*	96	96	96	96

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](http://vode.com).

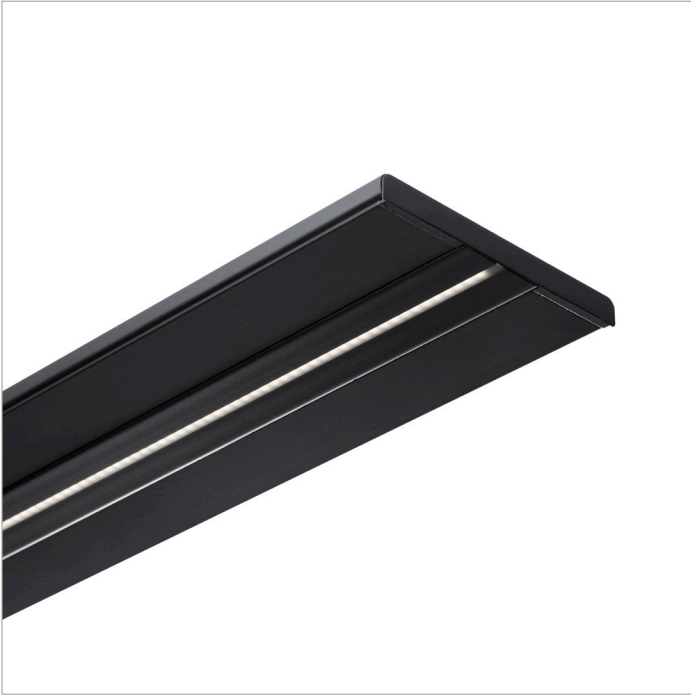

## IES Report

ZipThree® | Ceiling Cable | 707 | Symmetric, up | 40° Symmetric, down | 90 CRI | HO

707-Z3-XX-4-48-CC-XX-XX-XX-X-0-Z-HO-359-U1S1-0-BL-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	69	71	73	76
Total Lumens, 4' rail length (1219mm)	7367	7599	7754	7909
Lumens per foot (305mm)	1842	1900	1939	1977
Lumens per foot UP (305mm)	1345	1387	1416	1372
Lumens per foot DOWN (305mm)	497	512	523	507
Input Power (W), 4' rail length (1219mm)	107.2	107.2	107.2	107.2
Watts per foot (305mm)	26.8	26.8	26.8	26.8
CRI*	96	96	96	96

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](http://vode.com).