

IES Report


ZipWave® | 707 | Clear with EdgeSoft™ | 80 CRI | LO

707-Z9-4-48-AC / EL-XX-X-0-Z-LO-35-C1-0-AL-0

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	92	95	97	99
Total Lumens, 4' rail length (1219mm)	1487	1534	1565	1596
Lumens per foot (305mm)	372	383	391	399
Input Power (W), 4' rail length (1219mm)	16.3	16.3	16.3	16.3
Watts per foot (305mm)	4.1	4.1	4.1	4.1
CRI	85	85	85	85

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

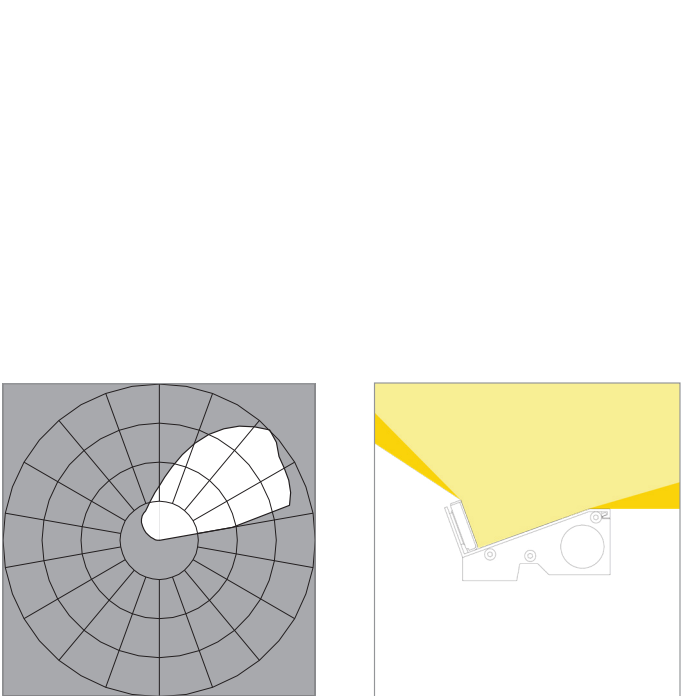

IES Report



ZipWave[®] | 707 | Clear with EdgeSoft[™] | 80 CRI | SO

707-Z9-4-48-AC / EL-XX-X-0-Z-SO-35-C1-0-AL-0

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	113	117	119	121
Total Lumens, 4' rail length (1219mm)	2973	3067	3130	3192
Lumens per foot (305mm)	743	767	782	798
Input Power (W), 4' rail length (1219mm)	26.4	26.4	26.4	26.4
Watts per foot (305mm)	6.7	6.7	6.7	6.7
CRI	85	85	85	85

Due to the large number of options in Vode’s product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).




IES Report
ZipWave® | 707 | Clear with EdgeSoft™ | 80 CRI | HO

707-Z9-4-48-AC / EL-XX-X-0-Z-HO-35-C1-0-AL-0

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	105	109	111	113
Total Lumens, 4' rail length (1219mm)	5649	5827	5946	6065
Lumens per foot (305mm)	1412	1457	1487	1516
Input Power (W), 4' rail length (1219mm)	53.9	53.9	53.9	53.9
Watts per foot (305mm)	13.5	13.5	13.5	13.5
CRI	85	85	85	85

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

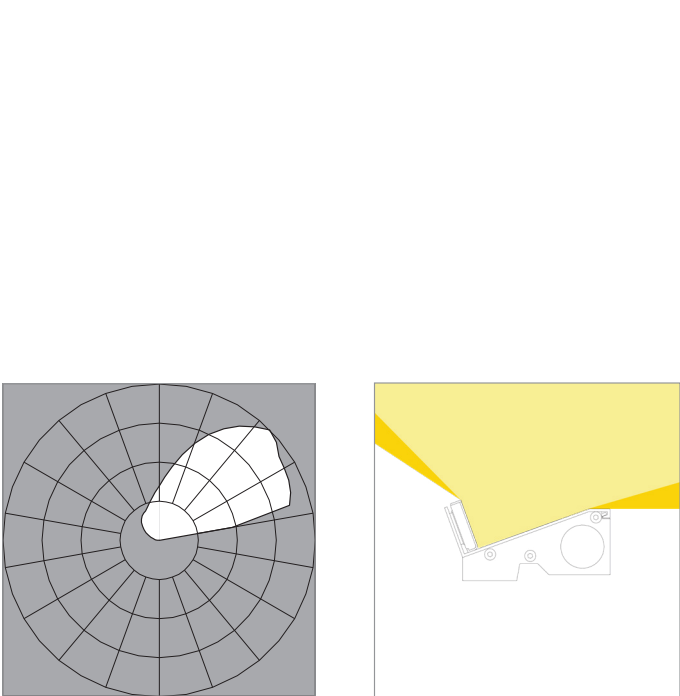



IES Report
ZipWave® | 707 | Clear with EdgeSoft™ | 90 CRI | LO

707-Z9-4-48-AC / EL-XX-X-0-Z-LO-359-C1-0-AL-0

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	79	82	84	85
Total Lumens, 4' rail length (1219mm)	1282	1322	1349	1376
Lumens per foot (305mm)	320	331	337	344
Input Power (W), 4' rail length (1219mm)	16.3	16.3	16.3	16.3
Watts per foot (305mm)	4.1	4.1	4.1	4.1
CRI	96	96	96	96

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).



IES Report



ZipWave® | 707 | Clear with EdgeSoft™ | 90 CRI | SO

707-Z9-4-48-AC / EL-XX-X-0-Z-SO-359-C1-0-AL-0

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	97	101	103	105
Total Lumens, 4' rail length (1219mm)	2563	2644	2698	2752
Lumens per foot (305mm)	641	661	675	688
Input Power (W), 4' rail length (1219mm)	26.4	26.4	26.4	26.4
Watts per foot (305mm)	6.7	6.7	6.7	6.7
CRI	96	96	96	96

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).



IES Report

ZipWave® | 707 | Clear with EdgeSoft™ | 90 CRI | HO

707-Z9-4-48-AC / EL-XX-X-0-Z-HO-359-C1-0-AL-0

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	91	94	96	98
Total Lumens, 4' rail length (1219mm)	4870	5024	5126	5229
Lumens per foot (305mm)	1217	1256	1282	1307
Input Power (W), 4' rail length (1219mm)	53.9	53.9	53.9	53.9
Watts per foot (305mm)	13.5	13.5	13.5	13.5
CRI	96	96	96	96

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).