

## IES Report




DoubleBox™ | 107 | Wide Batwing, up | 60° Symmetric, down | 80 CRI | LO

107-DB-XX-4-48-XX-XX-XX-XX-X-X-Z-LO-35-G1S2-X-AL / WH-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	85	88	90	90
Total Lumens, 4' rail length (1219mm)	2337	2411	2460	2460
Lumens per foot (305mm)	584	603	615	615
Lumens per foot UP (305mm)	371	383	391	391
Lumens per foot DOWN (305mm)	213	220	224	224
Input Power (W), 4' rail length (1219mm)	27.6	27.6	27.6	27.6
Watts per foot (305mm)	6.9	6.9	6.9	6.9
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

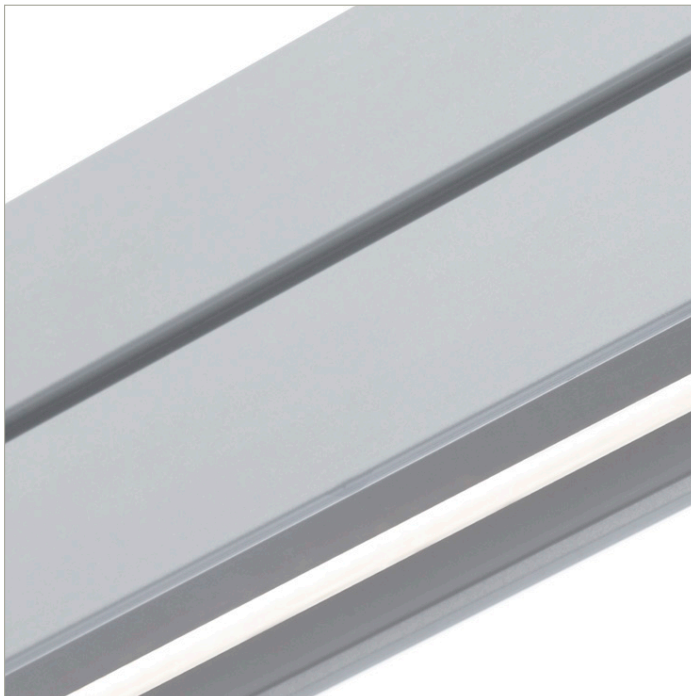

## IES Report




**DoubleBox™ | 107 | Wide Batwing, up | 60° Symmetric, down | 80 CRI | SO**

**107-DB-XX-4-48-XX-XX-XX-XX-X-X-Z-SO-35-G1S2-X-AL / WH-X**

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	98	101	103	103
Total Lumens, 4' rail length (1219mm)	4675	4822	4921	4921
Lumens per foot (305mm)	1169	1206	1230	1230
Lumens per foot UP (305mm)	743	766	782	782
Lumens per foot DOWN (305mm)	426	439	448	448
Input Power (W), 4' rail length (1219mm)	47.8	47.8	47.8	47.8
Watts per foot (305mm)	12.0	12.0	12.0	12.0
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

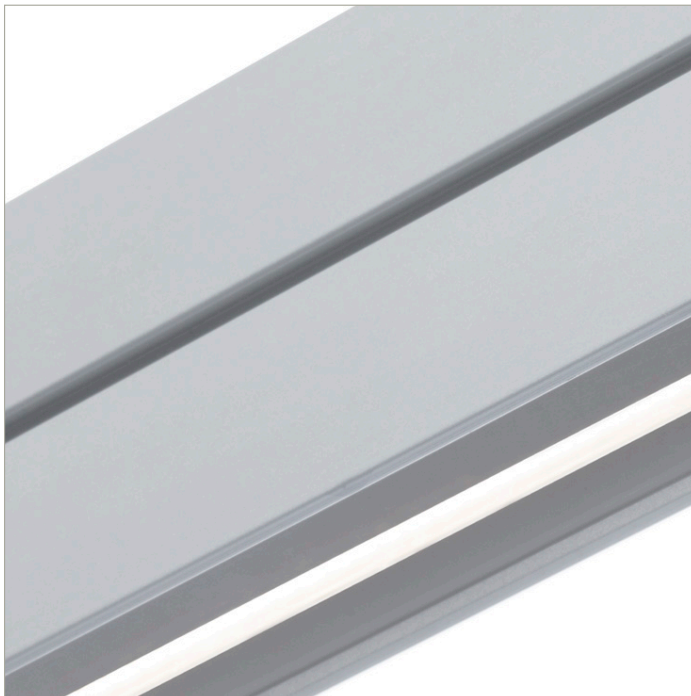

## IES Report




**DoubleBox™ | 107 | Wide Batwing, up | 60° Symmetric, down | 80 CRI | HO**

**107-DB-XX-4-48-XX-XX-XX-XX-X-X-Z-HO-35-G1S2-X-AL / WH-X**

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	91	94	96	96
Total Lumens, 4' rail length (1219mm)	8882	9162	9349	9349
Lumens per foot (305mm)	2220	2291	2337	2337
Lumens per foot UP (305mm)	1411	1456	1485	1485
Lumens per foot DOWN (305mm)	809	835	852	852
Input Power (W), 4' rail length (1219mm)	98.1	98.1	98.1	98.1
Watts per foot (305mm)	24.6	24.6	24.6	24.6
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

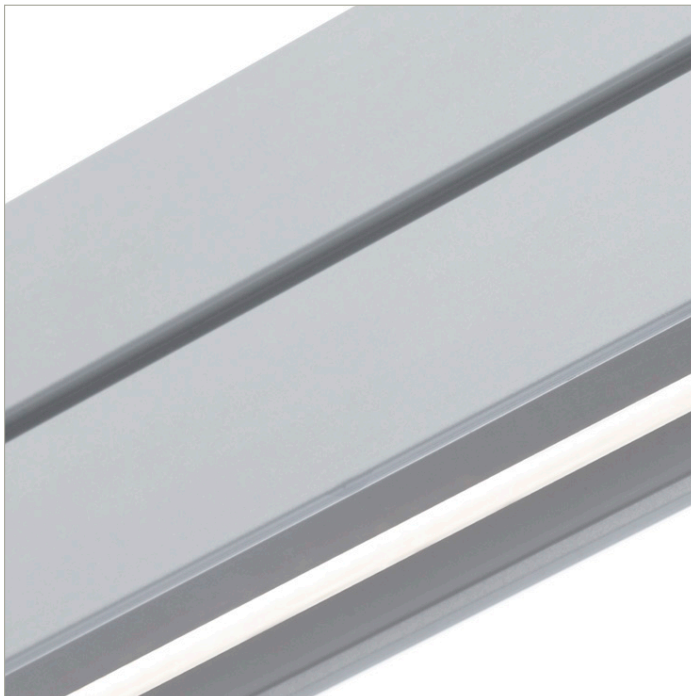

## IES Report




# DoubleBox™ | 107 | Wide Batwing, up | 60° Symmetric, down | 90 CRI | LO

107-DB-XX-4-48-XX-XX-XX-XX-X-X-Z-LO-359-G1S2-X-AL / WH-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	74	76	77	78
Total Lumens, 4' rail length (1219mm)	2015	2079	2121	2142
Lumens per foot (305mm)	504	520	530	536
Lumens per foot UP (305mm)	320	330	337	340
Lumens per foot DOWN (305mm)	184	189	193	195
Input Power (W), 4' rail length (1219mm)	27.6	27.6	27.6	27.6
Watts per foot (305mm)	6.9	6.9	6.9	6.9
CRI	94	94	94	94

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

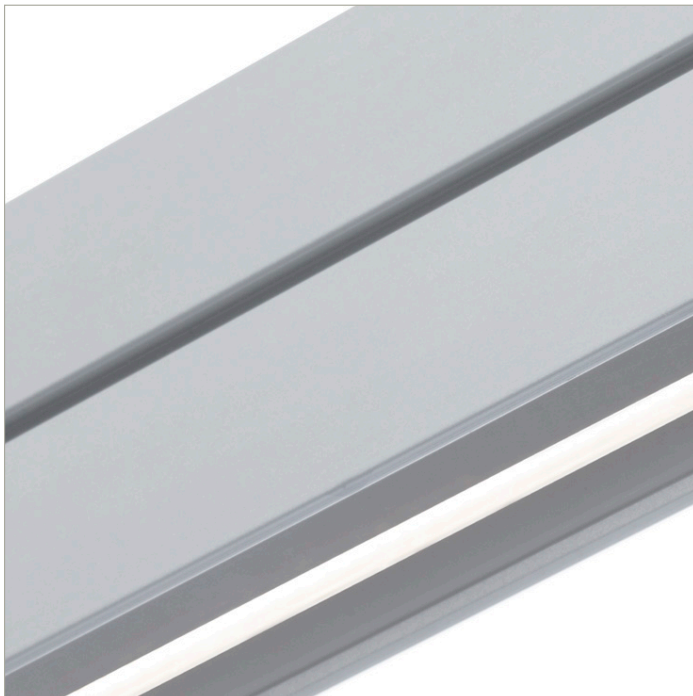

## IES Report




DoubleBox™ | 107 | Wide Batwing, up | 60° Symmetric, down | 90 CRI |SO

107-DB-XX-4-48-XX-XX-XX-XX-X-X-Z-SO-359-G1S2-X-AL / WH-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	85	87	89	90
Total Lumens, 4' rail length (1219mm)	4030	4157	4242	4284
Lumens per foot (305mm)	1007	1039	1061	1071
Lumens per foot UP (305mm)	640	660	674	681
Lumens per foot DOWN (305mm)	367	379	386	390
Input Power (W), 4' rail length (1219mm)	47.8	47.8	47.8	47.8
Watts per foot (305mm)	12.0	12.0	12.0	12.0
CRI	94	94	94	94

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

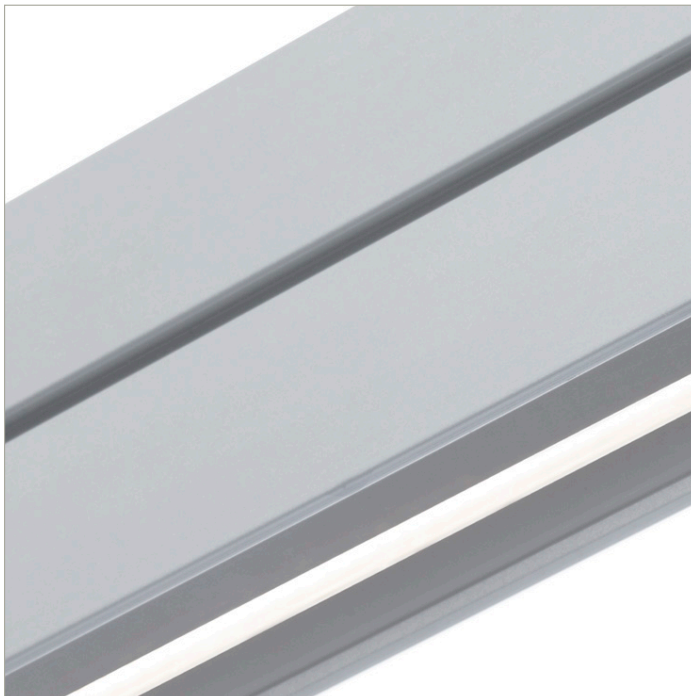

## IES Report

DoubleBox™ | 107 | Wide Batwing, up | 60° Symmetric, down | 90 CRI | HO

107-DB-XX-4-48-XX-XX-XX-XX-X-X-Z-HO-359-G1S2-X-AL / WH-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	79	81	83	83
Total Lumens, 4' rail length (1219mm)	7657	7899	8060	8140
Lumens per foot (305mm)	1914	1975	2015	2035
Lumens per foot UP (305mm)	1216	1255	1281	1293
Lumens per foot DOWN (305mm)	698	720	734	742
Input Power (W), 4' rail length (1219mm)	98.1	98.1	98.1	98.1
Watts per foot (305mm)	24.6	24.6	24.6	24.6
CRI	94	94	94	94

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).