

## IES Report




DoubleBox™ | 107 | Wide Batwing, up | White Baffle, down | 80 CRI | LO

107-DB-XX-4-48-XX-XX-XX-XX-X-X-Z-LO-35-G1WB-X-XX-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	87	89	91	91
Total Lumens, 4' rail length (1219mm)	2379	2454	2504	2504
Lumens per foot (305mm)	595	614	626	626
Lumens per foot UP (305mm)	371	383	391	391
Lumens per foot DOWN (305mm)	223	230	235	235
Input Power (W), 4' rail length (1219mm)	27.6	27.6	27.6	27.6
Watts per foot (305mm)	6.9	6.9	6.9	6.9
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

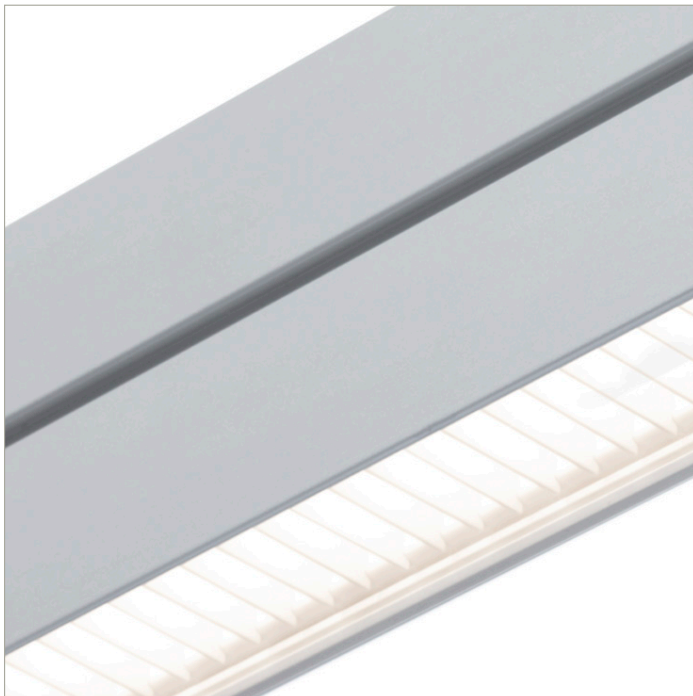

## IES Report




DoubleBox™ | 107 | Wide Batwing, up | White Baffle, down | 80 CRI | SO

107-DB-XX-4-48-XX-XX-XX-XX-X-X-Z-SO-35-G1WB-X-XX-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	100	103	105	105
Total Lumens, 4' rail length (1219mm)	4758	4909	5009	5009
Lumens per foot (305mm)	1190	1227	1252	1252
Lumens per foot UP (305mm)	743	766	782	782
Lumens per foot DOWN (305mm)	447	461	470	470
Input Power (W), 4' rail length (1219mm)	47.8	47.8	47.8	47.8
Watts per foot (305mm)	12.0	12.0	12.0	12.0
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

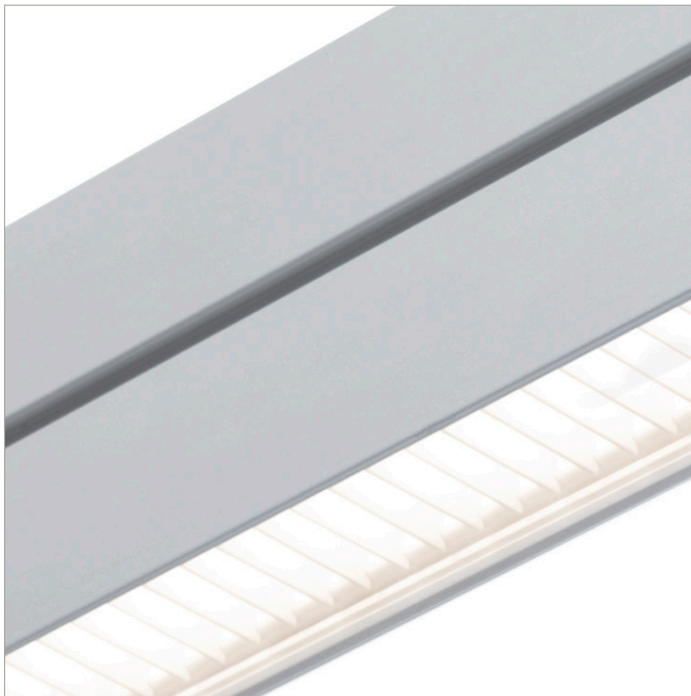

## IES Report




DoubleBox™ | 107 | Wide Batwing, up | White Baffle, down | 80 CRI | HO

107-DB-XX-4-48-XX-XX-XX-XX-X-X-Z-HO-35-G1WB-X-XX-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	93	96	97	97
Total Lumens, 4' rail length (1219mm)	9041	9327	9517	9517
Lumens per foot (305mm)	2260	2332	2379	2379
Lumens per foot UP (305mm)	1411	1456	1485	1485
Lumens per foot DOWN (305mm)	849	876	894	894
Input Power (W), 4' rail length (1219mm)	98.1	98.1	98.1	98.1
Watts per foot (305mm)	24.6	24.6	24.6	24.6
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

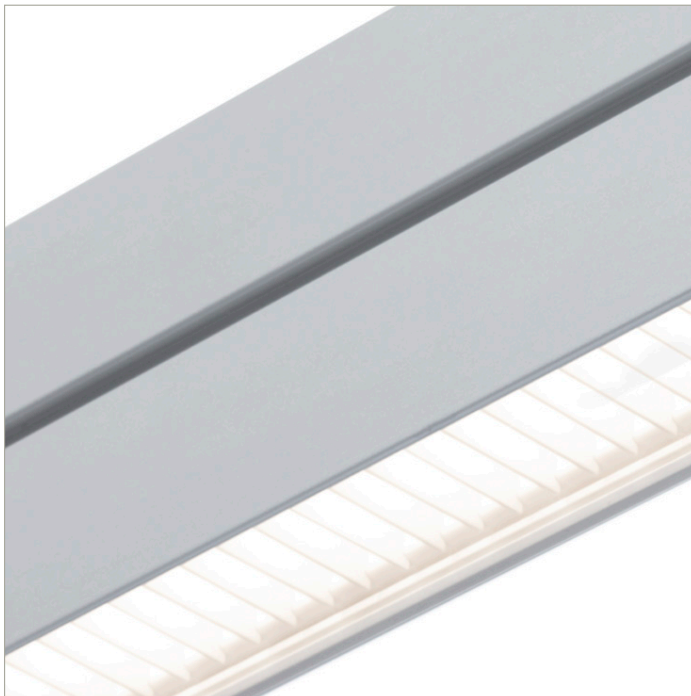

## IES Report




DoubleBox™ | 107 | Wide Batwing, up | White Baffle, down | 90 CRI | LO

107-DB-XX-4-48-XX-XX-XX-XX-X-X-Z-LO-359-G1WB-X-XX-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	75	77	79	80
Total Lumens, 4' rail length (1219mm)	2051	2116	2159	2181
Lumens per foot (305mm)	513	529	540	545
Lumens per foot UP (305mm)	320	330	337	340
Lumens per foot DOWN (305mm)	193	199	203	205
Input Power (W), 4' rail length (1219mm)	27.6	27.6	27.6	27.6
Watts per foot (305mm)	6.9	6.9	6.9	6.9
CRI	94	94	94	94

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

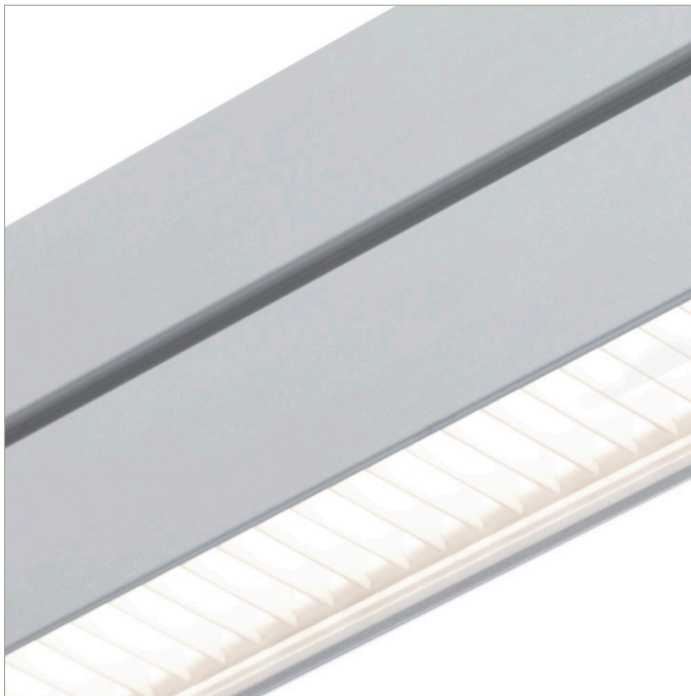

## IES Report




DoubleBox™ | 107 | Wide Batwing, up | White Baffle, down | 90 CRI | SO

107-DB-XX-4-48-XX-XX-XX-XX-X-X-Z-SO-359-G1WB-X-XX-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	86	89	91	92
Total Lumens, 4' rail length (1219mm)	4102	4232	4318	4361
Lumens per foot (305mm)	1026	1058	1080	1090
Lumens per foot UP (305mm)	640	660	674	681
Lumens per foot DOWN (305mm)	385	397	405	410
Input Power (W), 4' rail length (1219mm)	47.8	47.8	47.8	47.8
Watts per foot (305mm)	12.0	12.0	12.0	12.0
CRI	94	94	94	94

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

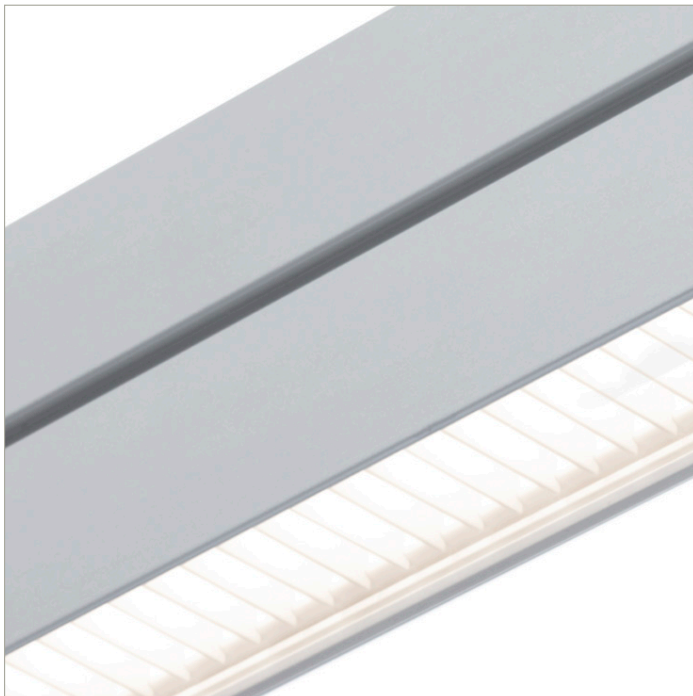

## IES Report

DoubleBox™ | 107 | Wide Batwing, up | White Baffle, down | 90 CRI | HO

107-DB-XX-4-48-XX-XX-XX-XX-X-X-Z-HO-359-G1WB-X-XX-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	80	82	84	85
Total Lumens, 4' rail length (1219mm)	7794	8040	8204	8286
Lumens per foot (305mm)	1948	2010	2051	2072
Lumens per foot UP (305mm)	1216	1255	1281	1293
Lumens per foot DOWN (305mm)	732	755	770	778
Input Power (W), 4' rail length (1219mm)	98.1	98.1	98.1	98.1
Watts per foot (305mm)	24.6	24.6	24.6	24.6
CRI	94	94	94	94

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).