

IES Report




ZipThree® | Ceiling Cable | 707 | Symmetric, up | 40° Symmetric, down | 80 CRI | LO

707-Z3-XX-4-48-CC-XX-XX-XX-X-0-Z-LO-35-U1S1-0-BL-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	78	80	82	82
Total Lumens, 4' rail length (1219mm)	2295	2368	2416	2416
Lumens per foot (305mm)	574	592	604	604
Lumens per foot UP (305mm)	438	452	461	461
Lumens per foot DOWN (305mm)	136	140	143	143
Input Power (W), 4' rail length (1219mm)	29.8	29.8	29.8	29.8
Watts per foot (305mm)	7.5	7.5	7.5	7.5
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on vode.com.

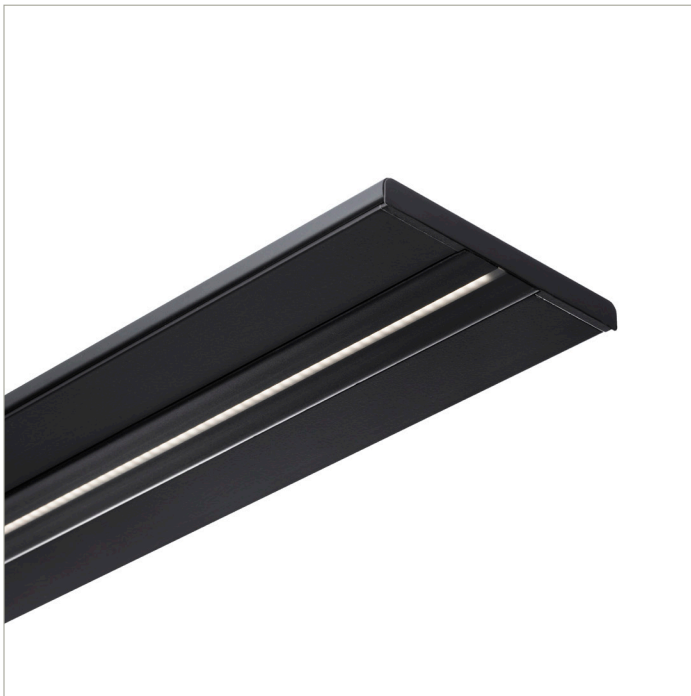

IES Report




ZipThree® | Ceiling Cable | 707 | Symmetric, up | 40° Symmetric, down | 80 CRI | SO

707-Z3-XX-4-48-CC-XX-XX-XX-X-0-Z-SO-35-U1S1-0-BL-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	88	91	93	93
Total Lumens, 4' rail length (1219mm)	4590	4735	4832	4832
Lumens per foot (305mm)	1148	1184	1208	1208
Lumens per foot UP (305mm)	876	903	922	922
Lumens per foot DOWN (305mm)	272	281	286	286
Input Power (W), 4' rail length (1219mm)	52.2	52.2	52.2	52.2
Watts per foot (305mm)	13.1	13.1	13.1	13.1
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on vode.com.

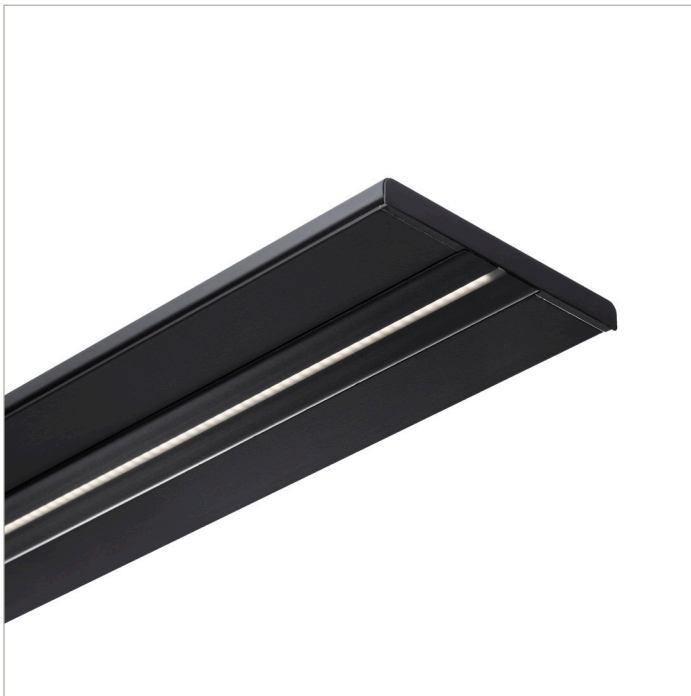

IES Report




ZipThree® | Ceiling Cable | 707 | Symmetric, up | 40° Symmetric, down | 80 CRI | HO

707-Z3-XX-4-48-CC-XX-XX-XX-X-0-Z-HO-35-U1S1-0-BL-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	82	84	86	86
Total Lumens, 4' rail length (1219mm)	8721	8997	9180	9180
Lumens per foot (305mm)	2180	2249	2295	2295
Lumens per foot UP (305mm)	1664	1716	1751	1751
Lumens per foot DOWN (305mm)	517	533	544	544
Input Power (W), 4' rail length (1219mm)	107.7	107.7	107.7	107.7
Watts per foot (305mm)	27.0	27.0	27.0	27.0
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on vode.com.

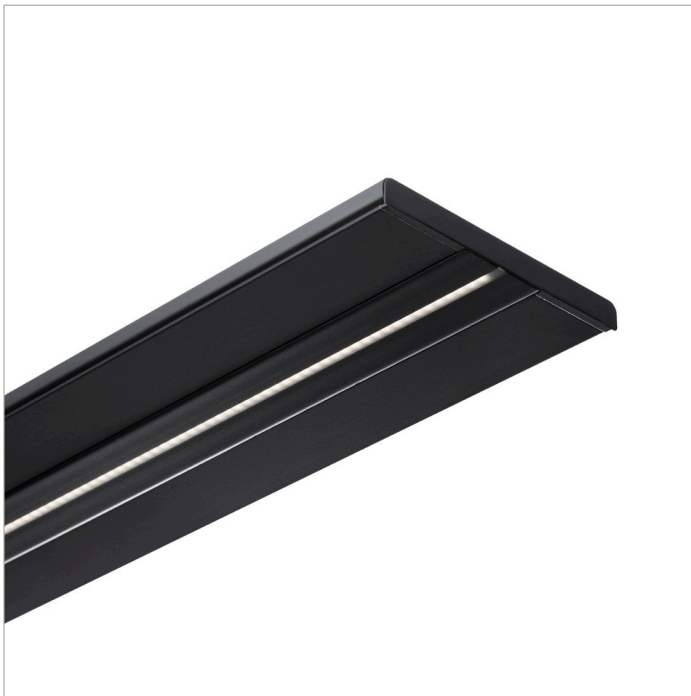

IES Report



ZipThree® | Ceiling Cable | 707 | Symmetric, up | 40° Symmetric, down | 90 CRI | LO

707-Z3-XX-4-48-CC-XX-XX-XX-X-0-Z-LO-359-U1S1-0-BL-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	67	69	70	73
Total Lumens, 4' rail length (1219mm)	1979	2041	2083	2103
Lumens per foot (305mm)	495	510	521	526
Lumens per foot UP (305mm)	377	389	397	401
Lumens per foot DOWN (305mm)	117	121	123	125
Input Power (W), 4' rail length (1219mm)	29.8	29.8	29.8	29.8
Watts per foot (305mm)	7.5	7.5	7.5	7.5
CRI	94	94	94	94

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on vode.com.



IES Report



ZipThree® | Ceiling Cable | 707 | Symmetric, up | 40° Symmetric, down | 90 CRI | SO

707-Z3-XX-4-48-CC-XX-XX-XX-X-0-Z-SO-359-U1S1-0-BL-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	77	79	81	84
Total Lumens, 4' rail length (1219mm)	3957	4082	4165	4207
Lumens per foot (305mm)	989	1021	1041	1052
Lumens per foot UP (305mm)	755	779	795	802
Lumens per foot DOWN (305mm)	234	242	247	249
Input Power (W), 4' rail length (1219mm)	51.7	51.7	51.7	51.7
Watts per foot (305mm)	13	13	13	13
CRI	94	94	94	94

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on vode.com.



IES Report

ZipThree® | Ceiling Cable | 707 | Symmetric, up | 40° Symmetric, down | 90 CRI | HO

707-Z3-XX-4-48-CC-XX-XX-XX-X-0-Z-HO-359-U1S1-0-BL-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	70	73	74	77
Total Lumens, 4' rail length (1219mm)	7518	7756	7914	7993
Lumens per foot (305mm)	1880	1939	1979	1998
Lumens per foot UP (305mm)	1434	1479	1510	1525
Lumens per foot DOWN (305mm)	445	460	469	474
Input Power (W), 4' rail length (1219mm)	107.7	107.7	107.7	107.7
Watts per foot (305mm)	27	27	27	27
CRI	94	94	94	94

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on vode.com.