

IES Report

ZipTwo® | 707 | Micro 3508, 60° Symmetric | 80 CRI | SO

707-Z2-4-48-XX-XX-X-0-Z-SO-35-S2-X-WH-0

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	91	94	96	96
Total Lumens, 4' rail length (1219mm)	2375	2450	2500	2500
Lumens per foot (305mm)	594	612	625	625
Input Power (W), 4' rail length (1219mm)	26.1	26.1	26.1	26.1
Watts per foot (305mm)	6.6	6.6	6.6	6.6
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).



IES INDOOR REPORT

PHOTOMETRIC FILENAME : VODE_707_Z2_SO_35_S2.IES

DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002

[TEST] L121911524 (SOURCE REPORT FOR REFERENCE)

[TESTLAB] REPORT BASED ON DATA FROM NVLAP ACCREDITED LAB

[ISSUE DATE] 12/23/2019

[MANUFAC] Vode Lighting

[LUMCAT] 707-Z2-48-Z-SO-35-S2-AL

[LUMINAIRE] ZipTwo LED, 48", 3500K, 80 CRI, zipper board, micro 3508, 60° symmetric lens,

[MORE] standard output, clear anodized finish

[TEST PROCEDURE] IESNA:LM-79-08

CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	2500
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	96
Total Luminaire Watts	26.11
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	0.94
Spacing Criterion (90-270)	1.14
Spacing Criterion (Diagonal)	1.04
Basic Luminous Shape	Rectangular
Luminous Length (0-180)	0.02 ft
Luminous Width (90-270)	3.98 ft
Luminous Height	0.00 ft

LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	48315	84551	129098
55	29508	49180	88797
65	22991	34486	64522
75	19981	26642	46623
85	17981	21577	28769

IES INDOOR REPORT
PHOTOMETRIC FILENAME : VODE_707_Z2_SO_35_S2.IES

CANDELA TABULATION

	<u>0</u>	<u>5</u>	<u>10</u>	<u>15</u>	<u>20</u>	<u>25</u>	<u>30</u>	<u>35</u>	<u>40</u>	<u>45</u>
0.0	1692.44	1692.44	1692.44	1692.44	1692.44	1692.44	1692.44	1692.44	1692.44	1692.44
1.0	1692.44	1692.44	1692.44	1692.44	1692.44	1692.44	1692.44	1692.44	1692.44	1692.44
3.0	1690.12	1690.12	1690.12	1690.12	1690.12	1690.12	1690.12	1690.12	1690.12	1690.12
5.0	1683.16	1683.16	1683.16	1683.16	1683.16	1684.32	1684.32	1684.32	1684.32	1684.32
7.0	1672.72	1672.72	1672.72	1672.72	1673.88	1673.88	1673.88	1676.20	1676.20	1675.04
9.0	1654.16	1654.16	1655.32	1655.32	1656.48	1657.64	1658.80	1659.96	1661.12	1662.28
11.0	1628.64	1628.64	1629.80	1630.96	1633.28	1635.60	1637.92	1640.24	1642.56	1643.72
13.0	1593.84	1593.84	1595.00	1597.32	1600.80	1604.28	1608.92	1612.40	1617.04	1620.52
15.0	1547.44	1547.44	1549.76	1554.40	1559.04	1564.84	1571.80	1578.76	1584.56	1590.36
17.0	1488.28	1490.60	1494.08	1499.88	1506.84	1516.12	1525.40	1535.84	1545.12	1554.40
19.5	1394.32	1396.64	1402.44	1410.56	1423.32	1436.08	1451.16	1467.40	1482.48	1496.40
22.5	1255.12	1257.44	1266.72	1279.48	1296.88	1317.76	1340.96	1364.16	1387.36	1409.40
25.5	1091.56	1095.04	1105.48	1122.88	1146.08	1173.92	1205.24	1237.72	1271.36	1302.68
29.0	887.40	890.88	903.64	924.52	952.36	986.00	1025.44	1067.20	1111.28	1153.04
33.0	664.68	669.32	682.08	702.96	730.80	769.08	810.84	858.40	909.44	960.48
37.5	459.36	462.84	474.44	491.84	517.36	551.00	589.28	636.84	689.04	741.24
42.5	301.60	303.92	312.04	324.80	343.36	368.88	399.04	436.16	479.08	524.32
47.5	204.16	205.32	211.12	219.24	232.00	249.40	270.28	295.80	325.96	360.76
55.0	125.28	125.28	128.76	133.40	140.36	148.48	160.08	172.84	190.24	208.80
65.0	71.92	73.08	74.24	75.40	78.88	82.36	87.00	92.80	99.76	107.88
75.0	38.28	38.28	38.28	39.44	40.60	41.76	42.92	45.24	47.56	51.04
85.0	11.60	11.60	11.60	11.60	12.76	12.76	12.76	12.76	12.76	13.92
90.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

Vert. Angles **Horizontal Angles**

	<u>50</u>	<u>55</u>	<u>60</u>	<u>65</u>	<u>70</u>	<u>75</u>	<u>80</u>	<u>85</u>	<u>90</u>
0.0	1692.44	1692.44	1692.44	1692.44	1692.44	1692.44	1692.44	1692.44	1692.44
1.0	1692.44	1692.44	1692.44	1692.44	1692.44	1692.44	1692.44	1692.44	1692.44
3.0	1690.12	1690.12	1690.12	1690.12	1690.12	1690.12	1690.12	1690.12	1690.12
5.0	1685.48	1685.48	1685.48	1685.48	1685.48	1685.48	1685.48	1685.48	1686.64
7.0	1677.36	1677.36	1677.36	1678.52	1678.52	1678.52	1678.52	1678.52	1678.52
9.0	1663.44	1664.60	1665.76	1665.76	1666.92	1666.92	1666.92	1668.08	1666.92
11.0	1646.04	1648.36	1649.52	1650.68	1650.68	1651.84	1651.84	1653.00	1653.00
13.0	1624.00	1626.32	1628.64	1630.96	1632.12	1632.12	1633.28	1633.28	1633.28
15.0	1596.16	1600.80	1603.12	1606.60	1607.76	1608.92	1608.92	1610.08	1610.08
17.0	1562.52	1568.32	1574.12	1577.60	1579.92	1581.08	1581.08	1582.24	1582.24
19.5	1508.00	1518.44	1526.56	1531.20	1534.68	1537.00	1538.16	1537.00	1537.00
22.5	1429.12	1444.20	1456.96	1465.08	1470.88	1473.20	1474.36	1474.36	1474.36
25.5	1330.52	1353.72	1371.12	1383.88	1392.00	1395.48	1396.64	1396.64	1396.64
29.0	1192.48	1224.96	1250.48	1269.04	1279.48	1285.28	1287.60	1288.76	1288.76
33.0	1011.52	1053.28	1089.24	1113.60	1129.84	1139.12	1142.60	1143.76	1143.76
37.5	795.76	845.64	887.40	919.88	941.92	955.84	962.80	965.12	965.12
42.5	573.04	621.76	665.84	701.80	729.64	747.04	758.64	764.44	765.60
47.5	399.04	438.48	476.76	510.40	539.40	560.28	575.36	583.48	585.80
55.0	230.84	255.20	280.72	306.24	329.44	350.32	365.40	374.68	377.00
65.0	117.16	128.76	141.52	154.28	168.20	180.96	191.40	198.36	201.84
75.0	54.52	59.16	63.80	69.60	75.40	80.04	84.68	88.16	89.32
85.0	13.92	15.08	15.08	16.24	16.24	17.40	17.40	18.56	18.56
90.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

IES INDOOR REPORT
PHOTOMETRIC FILENAME : VODE_707_Z2_SO_35_S2.IES

ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixt
0-20	576.49	N.A.	23.10
0-30	1133.98	N.A.	45.40
0-40	1603.11	N.A.	64.10
0-60	2198.36	N.A.	87.90
0-80	2457.29	N.A.	98.30
0-90	2499.61	N.A.	100.00
10-90	2369.78	N.A.	94.80
20-40	1026.62	N.A.	41.10
20-50	1426.01	N.A.	57.00
40-70	762.32	N.A.	30.50
60-80	258.93	N.A.	10.40
70-80	91.86	N.A.	3.70
80-90	42.32	N.A.	1.70
90-110	0.00	N.A.	0.00
90-120	0.00	N.A.	0.00
90-130	0.00	N.A.	0.00
90-150	0.00	N.A.	0.00
90-180	0.00	N.A.	0.00
110-180	0.00	N.A.	0.00
0-180	2499.61	N.A.	100.00

Total Luminaire Efficiency = N.A. %

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	129.84
10-20	446.65
20-30	557.49
30-40	469.13
40-50	399.39
50-60	195.86
60-70	167.07
70-80	91.86
80-90	42.32
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00


IES INDOOR REPORT
PHOTOMETRIC FILENAME : VODE_707_Z2_SO_35_S2.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	111	107	103	100	108	104	101	98	100	98	95	96	94	92	93	91	90	88
2	103	96	90	85	100	94	89	84	90	86	82	87	84	81	84	81	79	77
3	95	86	80	74	93	85	79	74	82	77	72	79	75	71	77	73	70	68
4	89	79	71	65	87	77	70	65	75	69	64	73	68	63	71	66	63	61
5	83	72	64	58	81	71	63	58	69	62	58	67	61	57	65	60	56	55
6	77	66	58	53	76	65	58	52	63	57	52	62	56	52	60	55	51	49
7	73	61	53	48	71	60	53	48	59	52	47	57	51	47	56	51	47	45
8	68	56	49	44	67	56	48	44	54	48	43	53	47	43	52	47	43	41
9	64	52	45	40	63	52	45	40	51	44	40	50	44	40	49	43	39	38
10	61	49	42	37	59	48	42	37	47	41	37	47	41	37	46	40	37	35

POLAR GRAPH

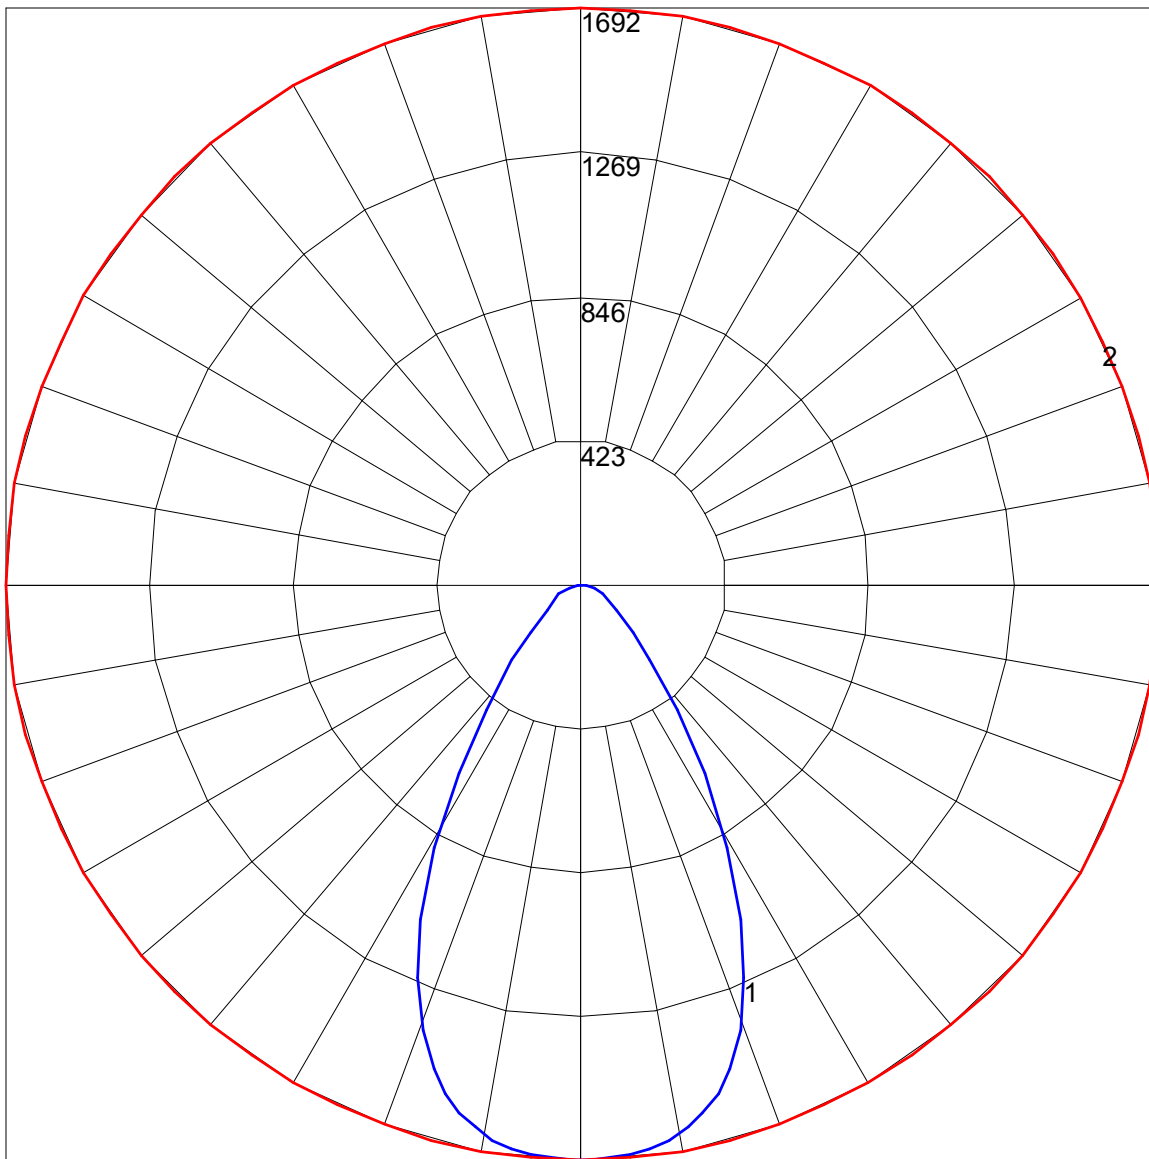

Maximum Candela = 1692.44 Located At Horizontal Angle = 0, Vertical Angle = 0
1 - Vertical Plane Through Horizontal Angles (0 - 180)
2 - Horizontal Cone Through Vertical Angle (0) (Through Max. Cd.)