

IES Report

ZipTwo® | 707 | Micro 3508, 120° Symmetric | 80 CRI | LO

707-Z2-4-48-XX-XX-X-0-Z-LO-35-S3-X-BL-0

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	112	115	118	118
Total Lumens, 4' rail length (1219mm)	1658	1710	1745	1745
Lumens per foot (305mm)	414	428	436	436
Input Power (W), 4' rail length (1219mm)	14.9	14.9	14.9	14.9
Watts per foot (305mm)	3.8	3.8	3.8	3.8
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).



IES INDOOR REPORT

PHOTOMETRIC FILENAME : VODE_707_Z2_LO_35_S3_BL.IES

DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002

[TEST] L121911530 (SOURCE REPORT FOR REFERENCE)

[TESTLAB] REPORT BASED ON DATA FROM NVLAP ACCREDITED LAB

[ISSUE DATE] 12/23/2019

[MANUFAC] Vode Lighting

[LUMCAT] 707-Z2-48-Z-LO-35-S3-BL

[LUMINAIRE] ZipTwo LED, 48", 3500K, 80 CRI, zipper board, micro 3508, 120° symmetric black lens,

[MORE] low output, black anodized finish

[TEST PROCEDURE] IESNA:LM-79-08

CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	1745
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	117
Total Luminaire Watts	14.89
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	1.68
Spacing Criterion (90-270)	1.18
Spacing Criterion (Diagonal)	1.58
Basic Luminous Shape	Rectangular
Luminous Length (0-180)	0.07 ft
Luminous Width (90-270)	3.98 ft
Luminous Height	0.00 ft

LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	29413	25645	17445
55	26815	24317	16784
65	20925	20130	15468
75	13321	13321	11677
85	7706	7192	5908

IES INDOOR REPORT
PHOTOMETRIC FILENAME : VODE_707_Z2_LO_35_S3_BL.IES

CANDELA TABULATION

	<u>0</u>	<u>5</u>	<u>10</u>	<u>15</u>	<u>20</u>	<u>25</u>	<u>30</u>	<u>35</u>	<u>40</u>	<u>45</u>
0	531.86	531.86	531.86	531.86	531.86	531.86	531.86	531.86	531.86	531.86
5	536.50	536.50	536.50	535.92	535.92	535.34	534.76	534.18	533.60	533.02
10	553.32	552.74	552.16	551.00	549.26	546.94	544.62	542.30	539.40	535.92
15	579.42	578.26	576.52	574.20	570.14	565.50	560.28	554.48	547.52	541.14
20	606.10	605.52	602.62	598.56	593.34	585.80	577.10	567.24	556.80	545.20
25	626.98	625.82	622.92	617.70	610.74	601.46	591.02	577.68	562.60	547.52
30	632.20	631.62	628.72	623.50	615.96	605.52	593.92	578.84	562.02	543.46
35	619.44	618.86	615.96	611.32	604.36	595.08	583.48	568.98	550.42	530.12
40	587.54	586.96	585.22	581.16	575.36	567.82	556.80	543.46	526.06	506.34
45	538.82	538.24	536.50	534.18	530.12	523.74	515.62	503.44	488.36	469.80
50	474.44	474.44	473.86	472.12	469.22	465.16	459.36	449.50	436.74	420.50
55	398.46	398.46	397.88	397.88	396.72	394.40	390.34	383.96	374.10	361.34
60	314.36	314.36	314.36	314.94	314.94	314.36	312.62	308.56	302.18	292.90
65	229.10	229.10	229.68	230.26	231.42	231.42	230.84	229.68	225.62	220.40
70	150.80	151.38	151.96	152.54	153.12	154.28	154.28	153.70	151.96	149.64
75	89.32	89.32	89.32	89.90	90.48	91.06	91.06	91.06	90.48	89.32
80	45.82	46.40	46.40	46.40	46.40	46.40	46.40	46.40	45.82	45.24
85	17.40	17.40	17.40	17.40	17.40	17.40	17.40	16.82	16.82	16.24
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

Vert. Angles **Horizontal Angles**

	<u>50</u>	<u>55</u>	<u>60</u>	<u>65</u>	<u>70</u>	<u>75</u>	<u>80</u>	<u>85</u>	<u>90</u>
0	531.86	531.86	531.86	531.86	531.86	531.86	531.86	531.86	531.86
5	532.44	531.86	531.28	530.70	530.12	529.54	529.54	529.54	528.96
10	533.02	530.12	527.80	525.48	523.16	521.42	520.26	519.10	519.10
15	534.18	527.22	521.42	515.62	510.98	506.92	504.02	502.86	501.70
20	533.60	522.58	511.56	502.28	494.16	487.20	482.56	479.66	478.50
25	530.70	514.46	499.38	484.88	472.70	463.42	456.46	451.82	450.66
30	523.16	502.28	482.56	464.00	448.34	435.58	426.88	421.08	419.34
35	507.50	483.72	460.52	439.06	420.50	405.42	394.98	388.60	386.28
40	483.14	458.20	432.68	409.48	389.18	372.94	361.92	354.96	353.22
45	447.18	422.82	397.88	374.68	354.38	338.72	327.70	321.32	319.58
50	400.78	378.16	355.54	334.66	316.10	302.18	292.90	287.10	284.78
55	344.52	325.96	306.82	289.42	274.92	263.32	255.78	251.14	249.40
60	280.72	266.80	252.88	240.12	229.10	220.98	215.18	212.28	211.12
65	212.28	203.58	194.88	186.76	180.38	175.16	171.68	169.94	169.36
70	145.58	140.94	136.30	132.24	129.34	127.02	125.28	124.12	124.12
75	87.00	85.26	83.52	81.78	80.04	79.46	78.88	78.30	78.30
80	44.08	42.92	42.34	41.18	40.60	40.02	40.02	40.02	40.02
85	15.66	15.08	14.50	13.92	13.92	13.92	13.34	13.34	13.34
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

IES INDOOR REPORT
PHOTOMETRIC FILENAME : VODE_707_Z2_LO_35_S3_BL.IES

ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixt
0-20	204.23	N.A.	11.70
0-30	454.46	N.A.	26.00
0-40	776.29	N.A.	44.50
0-60	1423.34	N.A.	81.60
0-80	1724.72	N.A.	98.80
0-90	1745.24	N.A.	100.00
10-90	1694.26	N.A.	97.10
20-40	572.06	N.A.	32.80
20-50	915.92	N.A.	52.50
40-70	853.81	N.A.	48.90
60-80	301.38	N.A.	17.30
70-80	94.63	N.A.	5.40
80-90	20.51	N.A.	1.20
90-110	0.00	N.A.	0.00
90-120	0.00	N.A.	0.00
90-130	0.00	N.A.	0.00
90-150	0.00	N.A.	0.00
90-180	0.00	N.A.	0.00
110-180	0.00	N.A.	0.00
0-180	1745.24	N.A.	100.00

Total Luminaire Efficiency = N.A. %

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	50.98
10-20	153.25
20-30	250.24
30-40	321.83
40-50	343.86
50-60	303.20
60-70	206.75
70-80	94.63
80-90	20.51
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00


IES INDOOR REPORT
PHOTOMETRIC FILENAME : VODE_707_Z2_LO_35_S3_BL.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	109	105	100	97	106	102	99	95	98	95	92	94	92	89	91	89	87	85
2	99	91	85	79	97	89	83	78	86	81	76	83	78	74	80	76	73	71
3	91	80	72	66	88	79	71	65	76	69	64	73	67	63	70	66	62	59
4	83	71	62	55	80	70	61	55	67	60	54	65	58	53	62	57	53	51
5	76	63	54	47	74	62	54	47	60	52	47	58	51	46	56	50	46	44
6	70	57	48	41	68	56	47	41	54	46	41	52	45	40	51	45	40	38
7	65	51	42	36	63	50	42	36	49	41	36	47	41	36	46	40	35	33
8	60	47	38	32	59	46	38	32	45	37	32	43	37	32	42	36	31	29
9	56	43	34	29	55	42	34	29	41	34	29	40	33	28	39	33	28	26
10	53	39	31	26	51	39	31	26	38	31	26	37	30	26	36	30	25	24

POLAR GRAPH

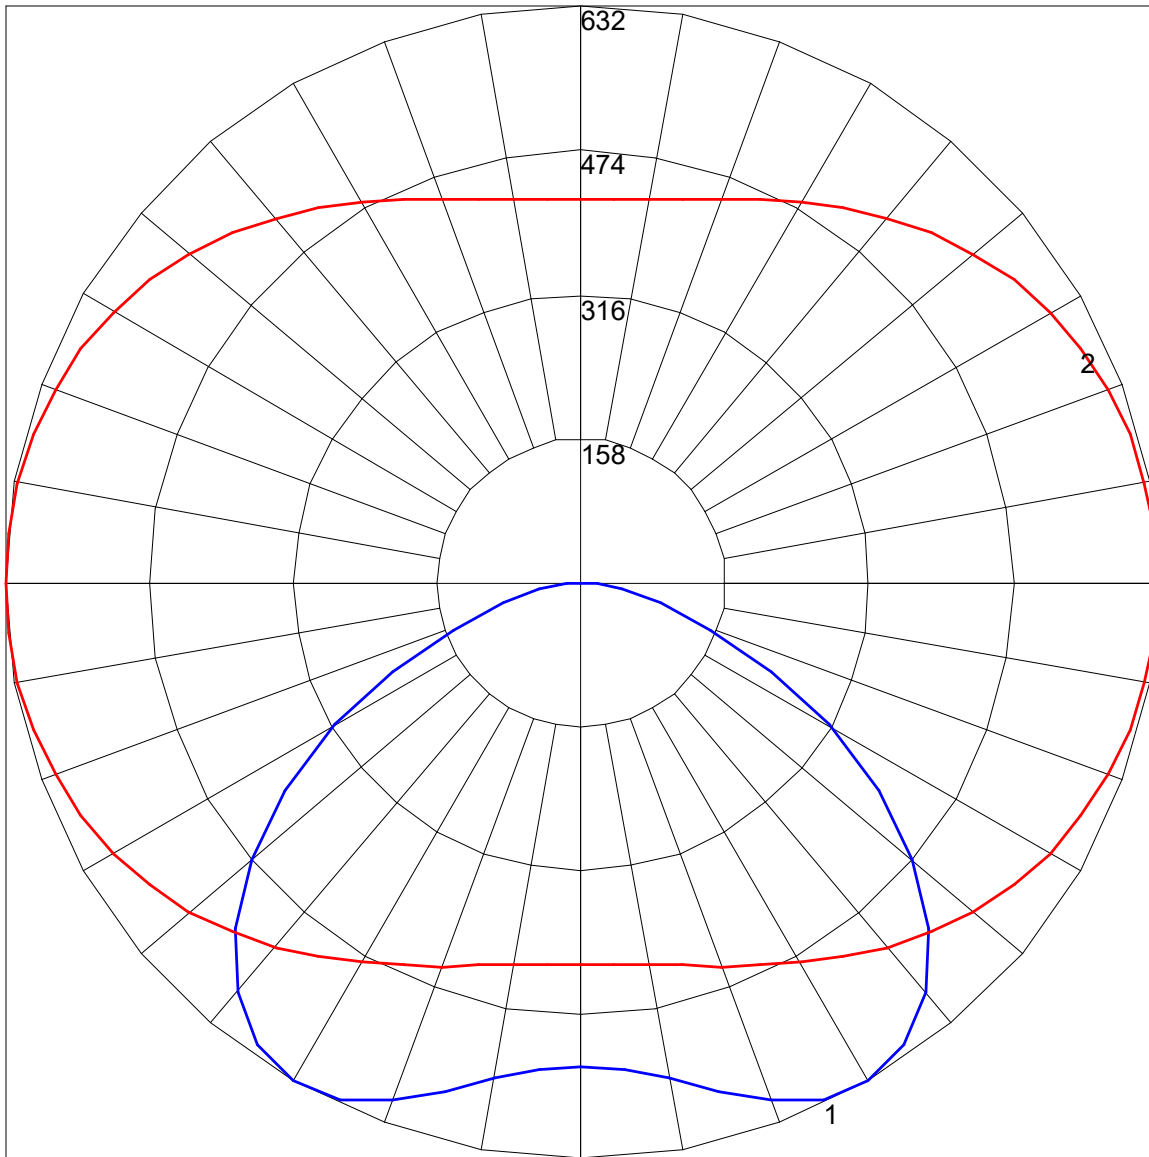

Maximum Candela = 632.2 Located At Horizontal Angle = 0, Vertical Angle = 30
1 - Vertical Plane Through Horizontal Angles (0 - 180)
2 - Horizontal Cone Through Vertical Angle (30) (Through Max. Cd.)