



IES Report

ZipTwo® | 707 | Micro 3508, 120° Symmetric | 90 CRI | LO

707-Z2-4-48-XX-XX-X-0-Z-LO-359-S3-X-BL-0

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	88	91	93	94
Total Lumens, 4' rail length (1219mm)	1429	1474	1505	1520
Lumens per foot (305mm)	357	369	376	380
Input Power (W), 4' rail length (1219mm)	16.3	16.3	16.3	16.3
Watts per foot (305mm)	4.1	4.1	4.1	4.1
CRI	94	94	94	94

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).



IES INDOOR REPORT

PHOTOMETRIC FILENAME : VODE_707_Z2_LO_359_S3_BL.IES

DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002

[TEST] L121911530 (SOURCE REPORT FOR REFERENCE)

[TESTLAB] REPORT BASED ON DATA FROM NVLAP ACCREDITED LAB

[ISSUE DATE] 12/23/2019

[MANUFAC] Vode Lighting

[LUMCAT] 707-Z2-48-Z-LO-359-S3-BL

[LUMINAIRE] ZipTwo LED, 48", 3500K, 90 CRI, zipper board, micro 3508, 120° symmetric black lens,

[MORE] low output, black anodized finish

[TEST PROCEDURE] IESNA:LM-79-08

CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	1505
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	101
Total Luminaire Watts	14.89
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	1.68
Spacing Criterion (90-270)	1.18
Spacing Criterion (Diagonal)	1.58
Basic Luminous Shape	Rectangular
Luminous Length (0-180)	0.07 ft
Luminous Width (90-270)	3.98 ft
Luminous Height	0.00 ft

LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	25356	22108	15039
55	23116	20963	14469
65	18039	17354	13335
75	11484	11484	10067
85	6643	6200	5093

IES INDOOR REPORT
PHOTOMETRIC FILENAME : VODE_707_Z2_LO_359_S3_BL.IES

CANDELA TABULATION

	<u>0</u>	<u>5</u>	<u>10</u>	<u>15</u>	<u>20</u>	<u>25</u>	<u>30</u>	<u>35</u>	<u>40</u>	<u>45</u>
0	458.5	458.5	458.5	458.5	458.5	458.5	458.5	458.5	458.5	458.5
5	462.5	462.5	462.5	462.0	462.0	461.5	461.0	460.5	460.0	459.5
10	477.0	476.5	476.0	475.0	473.5	471.5	469.5	467.5	465.0	462.0
15	499.5	498.5	497.0	495.0	491.5	487.5	483.0	478.0	472.0	466.5
20	522.5	522.0	519.5	516.0	511.5	505.0	497.5	489.0	480.0	470.0
25	540.5	539.5	537.0	532.5	526.5	518.5	509.5	498.0	485.0	472.0
30	545.0	544.5	542.0	537.5	531.0	522.0	512.0	499.0	484.5	468.5
35	534.0	533.5	531.0	527.0	521.0	513.0	503.0	490.5	474.5	457.0
40	506.5	506.0	504.5	501.0	496.0	489.5	480.0	468.5	453.5	436.5
45	464.5	464.0	462.5	460.5	457.0	451.5	444.5	434.0	421.0	405.0
50	409.0	409.0	408.5	407.0	404.5	401.0	396.0	387.5	376.5	362.5
55	343.5	343.5	343.0	343.0	342.0	340.0	336.5	331.0	322.5	311.5
60	271.0	271.0	271.0	271.5	271.5	271.0	269.5	266.0	260.5	252.5
65	197.5	197.5	198.0	198.5	199.5	199.5	199.0	198.0	194.5	190.0
70	130.0	130.5	131.0	131.5	132.0	133.0	133.0	132.5	131.0	129.0
75	77.0	77.0	77.0	77.5	78.0	78.5	78.5	78.5	78.0	77.0
80	39.5	40.0	40.0	40.0	40.0	40.0	40.0	40.0	39.5	39.0
85	15.0	15.0	15.0	15.0	15.0	15.0	15.0	14.5	14.5	14.0
90	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Vert. Horizontal Angles

	<u>50</u>	<u>55</u>	<u>60</u>	<u>65</u>	<u>70</u>	<u>75</u>	<u>80</u>	<u>85</u>	<u>90</u>
0	458.5	458.5	458.5	458.5	458.5	458.5	458.5	458.5	458.5
5	459.0	458.5	458.0	457.5	457.0	456.5	456.5	456.5	456.0
10	459.5	457.0	455.0	453.0	451.0	449.5	448.5	447.5	447.5
15	460.5	454.5	449.5	444.5	440.5	437.0	434.5	433.5	432.5
20	460.0	450.5	441.0	433.0	426.0	420.0	416.0	413.5	412.5
25	457.5	443.5	430.5	418.0	407.5	399.5	393.5	389.5	388.5
30	451.0	433.0	416.0	400.0	386.5	375.5	368.0	363.0	361.5
35	437.5	417.0	397.0	378.5	362.5	349.5	340.5	335.0	333.0
40	416.5	395.0	373.0	353.0	335.5	321.5	312.0	306.0	304.5
45	385.5	364.5	343.0	323.0	305.5	292.0	282.5	277.0	275.5
50	345.5	326.0	306.5	288.5	272.5	260.5	252.5	247.5	245.5
55	297.0	281.0	264.5	249.5	237.0	227.0	220.5	216.5	215.0
60	242.0	230.0	218.0	207.0	197.5	190.5	185.5	183.0	182.0
65	183.0	175.5	168.0	161.0	155.5	151.0	148.0	146.5	146.0
70	125.5	121.5	117.5	114.0	111.5	109.5	108.0	107.0	107.0
75	75.0	73.5	72.0	70.5	69.0	68.5	68.0	67.5	67.5
80	38.0	37.0	36.5	35.5	35.0	34.5	34.5	34.5	34.5
85	13.5	13.0	12.5	12.0	12.0	12.0	11.5	11.5	11.5
90	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

IES INDOOR REPORT
PHOTOMETRIC FILENAME : VODE_707_Z2_LO_359_S3_BL.IES

ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixt
0-20	176.06	N.A.	11.70
0-30	391.78	N.A.	26.00
0-40	669.21	N.A.	44.50
0-60	1227.02	N.A.	81.60
0-80	1486.83	N.A.	98.80
0-90	1504.51	N.A.	100.00
10-90	1460.57	N.A.	97.10
20-40	493.16	N.A.	32.80
20-50	789.59	N.A.	52.50
40-70	736.04	N.A.	48.90
60-80	259.81	N.A.	17.30
70-80	81.58	N.A.	5.40
80-90	17.68	N.A.	1.20
90-110	0.00	N.A.	0.00
90-120	0.00	N.A.	0.00
90-130	0.00	N.A.	0.00
90-150	0.00	N.A.	0.00
90-180	0.00	N.A.	0.00
110-180	0.00	N.A.	0.00
0-180	1504.51	N.A.	100.00

Total Luminaire Efficiency = N.A. %

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	43.94
10-20	132.11
20-30	215.72
30-40	277.44
40-50	296.43
50-60	261.38
60-70	178.24
70-80	81.58
80-90	17.68
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00


IES INDOOR REPORT
PHOTOMETRIC FILENAME : VODE_707_Z2_LO_359_S3_BL.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	109	105	100	97	106	102	99	95	98	95	92	94	92	89	91	89	87	85
2	99	91	85	79	97	89	83	78	86	81	76	83	78	74	80	76	73	71
3	91	80	72	66	88	78	71	65	76	69	64	73	67	63	70	66	62	59
4	83	71	62	55	80	69	61	55	67	60	54	65	58	53	62	57	53	51
5	76	63	54	47	74	62	54	47	60	52	47	58	51	46	56	50	46	44
6	70	57	48	41	68	56	47	41	54	46	41	52	45	40	51	45	40	38
7	65	51	42	36	63	50	42	36	49	41	36	47	41	36	46	40	35	33
8	60	47	38	32	59	46	38	32	45	37	32	43	37	32	42	36	31	29
9	56	43	34	29	55	42	34	29	41	34	28	40	33	28	39	33	28	26
10	53	39	31	26	51	39	31	26	38	31	26	37	30	26	36	30	25	24

POLAR GRAPH

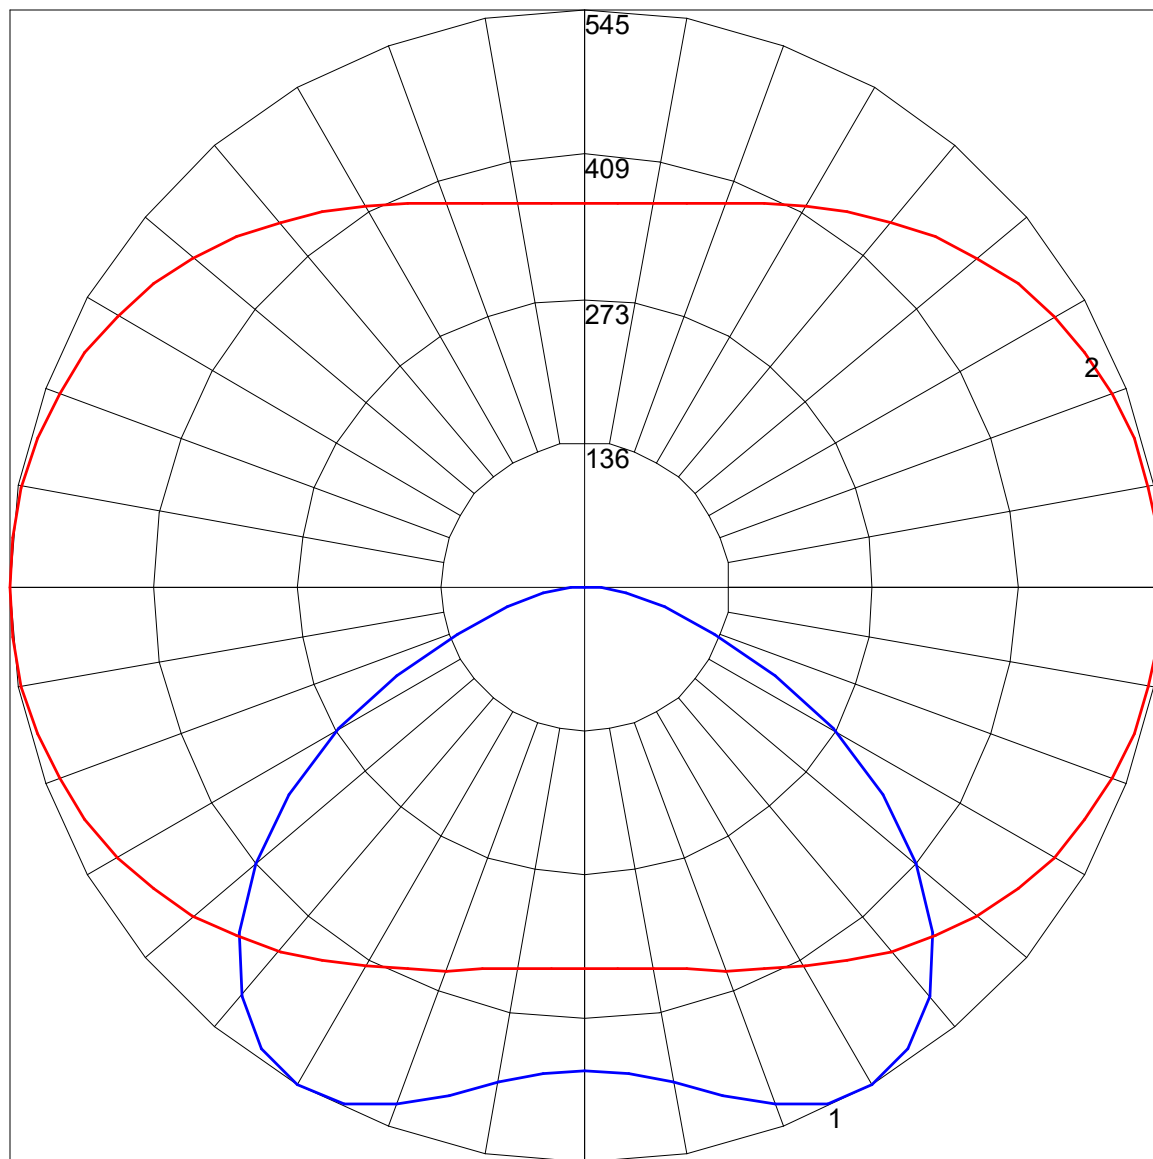

Maximum Candela = 545 Located At Horizontal Angle = 0, Vertical Angle = 30

1 - Vertical Plane Through Horizontal Angles (0 - 180)

2 - Horizontal Cone Through Vertical Angle (30) (Through Max. Cd.)