

IES Report




ZipTwo® | 707 | Square 3572, Single Side Diffuse | 80 CRI | LO

707-Z2-4-48-XX-XX-X-0-Z-LO-35-HA-X-WH-0

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	100	103	105	105
Total Lumens, 4' rail length (1219mm)	1478	1524	1555	1555
Lumens per foot (305mm)	369	381	389	389
Input Power (W), 4' rail length (1219mm)	14.9	14.9	14.9	14.9
Watts per foot (305mm)	3.8	3.8	3.8	3.8
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

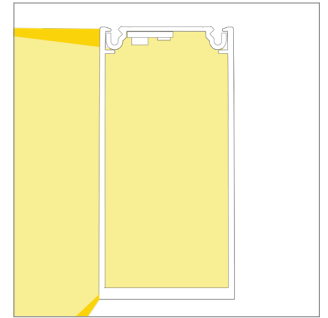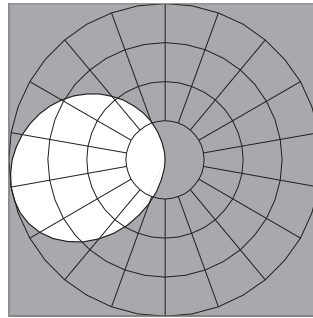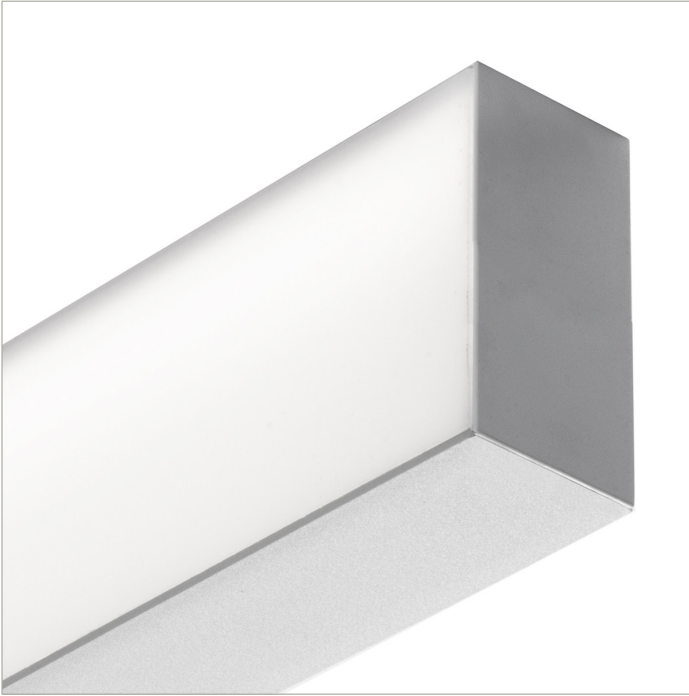

IES Report




ZipTwo® | 707 | Square 3572, Single Side Diffuse | 80 CRI | SO

707-Z2-4-48-XX-XX-X-0-Z-SO-35-HA-X-WH-0

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	114	117	120	120
Total Lumens, 4' rail length (1219mm)	2955	3049	3111	3111
Lumens per foot (305mm)	739	762	778	778
Input Power (W), 4' rail length (1219mm)	26.1	26.1	26.1	26.1
Watts per foot (305mm)	6.6	6.6	6.6	6.6
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

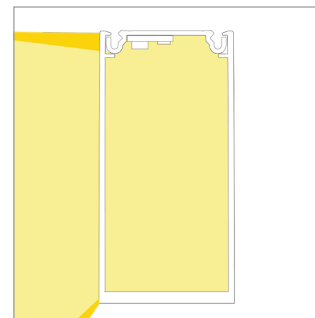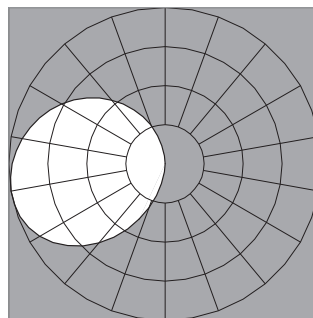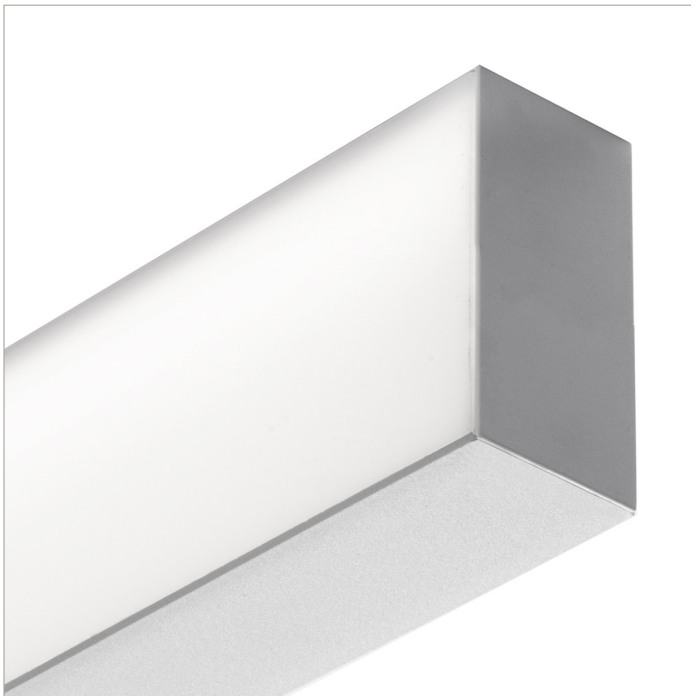

IES Report




ZipTwo® | 707 | Square 3572, Single Side Diffuse | 80 CRI | HO

707-Z2-4-48-XX-XX-X-0-Z-HO-35-HA-X-WH-0

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	113	116	118	118
Total Lumens, 4' rail length (1219mm)	4433	4573	4666	4666
Lumens per foot (305mm)	1108	1143	1167	1167
Input Power (W), 4' rail length (1219mm)	39.6	39.6	39.6	39.6
Watts per foot (305mm)	9.9	9.9	9.9	9.9
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

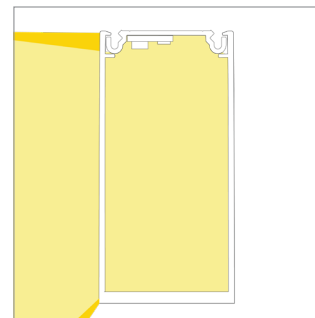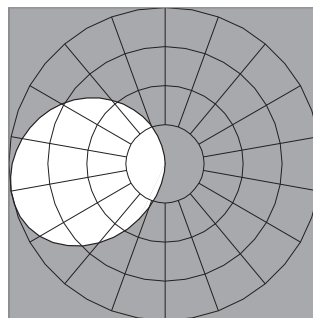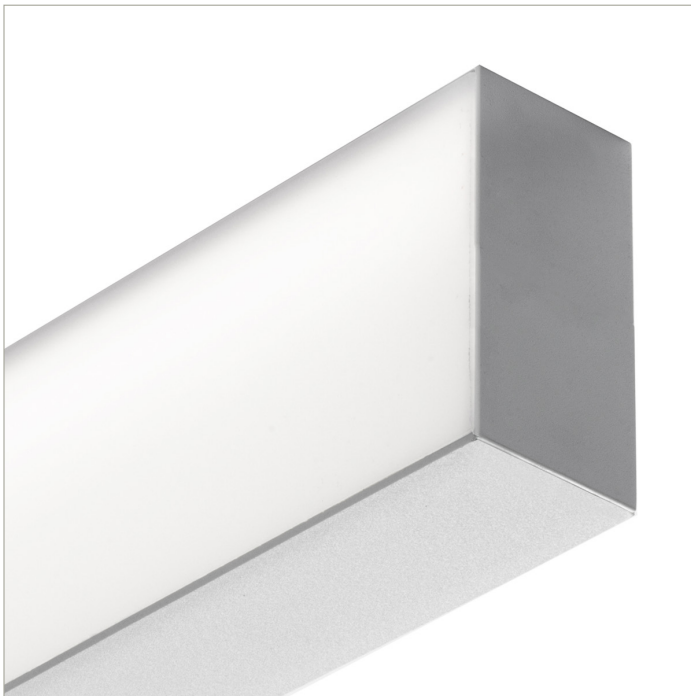

IES Report




ZipTwo® | 707 | Square 3572, Single Side Diffuse | 90 CRI | LO

707-Z2-4-48-XX-XX-X-0-Z-LO-359-HA-X-WH-0

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	86	89	91	91
Total Lumens, 4' rail length (1219mm)	1274	1314	1341	1354
Lumens per foot (305mm)	318	329	335	339
Input Power (W), 4' rail length (1219mm)	14.9	14.9	14.9	14.9
Watts per foot (305mm)	3.8	3.8	3.8	3.8
CRI	95	95	95	95

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

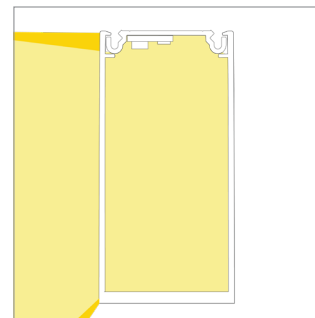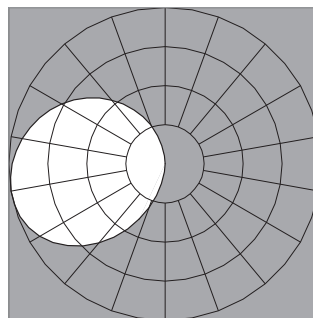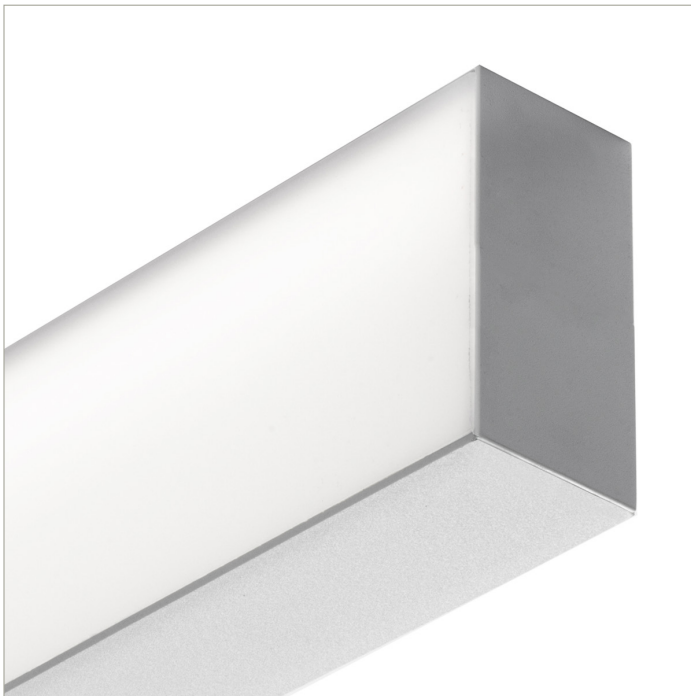

IES Report




ZipTwo® | 707 | Square 3572, Single Side Diffuse | 90 CRI | SO

707-Z2-4-48-XX-XX-X-0-Z-SO-359-HA-X-WH-0

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	98	101	103	104
Total Lumens, 4' rail length (1219mm)	2548	2628	2682	2709
Lumens per foot (305mm)	637	657	670	677
Input Power (W), 4' rail length (1219mm)	26.2	26.2	26.2	26.2
Watts per foot (305mm)	6.6	6.6	6.6	6.6
CRI	95	95	95	95

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

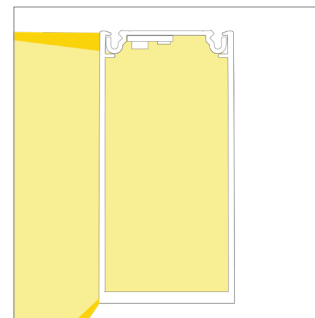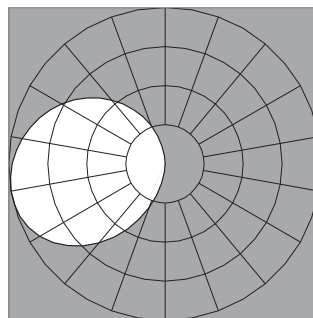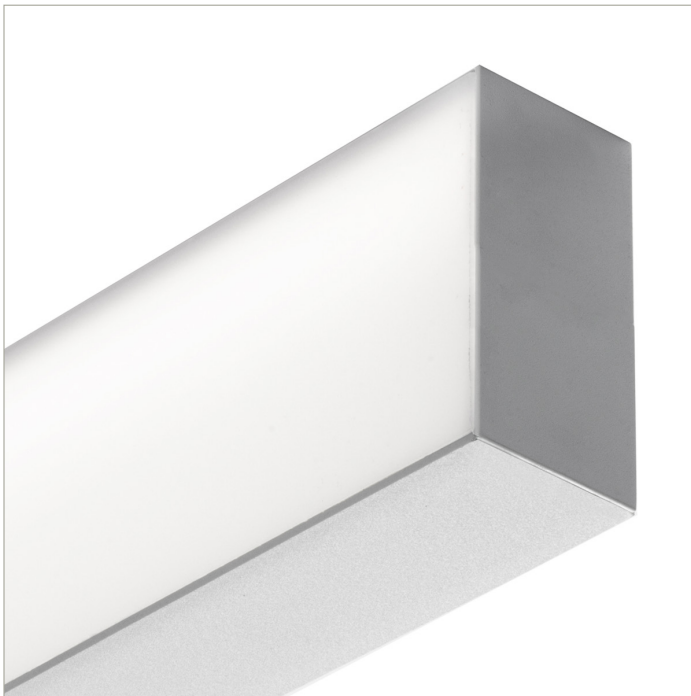

IES Report

ZipTwo® | 707 | Square 3572, Single Side Diffuse | 90 CRI | HO

707-Z2-4-48-XX-XX-X-0-Z-HO-359-HA-X-WH-0

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	97	100	102	103
Total Lumens, 4' rail length (1219mm)	3822	3942	4023	4063
Lumens per foot (305mm)	955	986	1006	1016
Input Power (W), 4' rail length (1219mm)	39.6	39.6	39.6	39.6
Watts per foot (305mm)	9.9	9.9	9.9	9.9
CRI	95	95	95	95

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).