

IES Report




ZipTwo® | 707 | Square 3554, Single Side Diffuse | 80 CRI | LO

707-Z2-4-48-XX-XX-X-0-Z-LO-35-JA-X-WH-0

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	93	96	98	98
Total Lumens, 4' rail length (1219mm)	1381	1425	1454	1454
Lumens per foot (305mm)	345	356	363	363
Input Power (W), 4' rail length (1219mm)	14.9	14.9	14.9	14.9
Watts per foot (305mm)	3.8	3.8	3.8	3.8
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

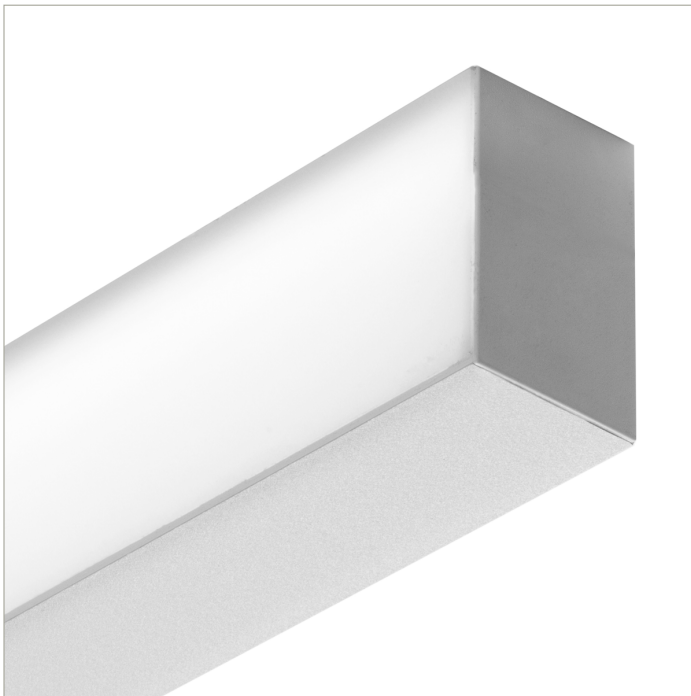

IES Report




ZipTwo® | 707 | Square 3554, Single Side Diffuse | 80 CRI | SO

707-Z2-4-48-XX-XX-X-0-Z-SO-35-JA-X-WH-0

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	106	110	112	112
Total Lumens, 4' rail length (1219mm)	2762	2849	2907	2907
Lumens per foot (305mm)	691	712	727	727
Input Power (W), 4' rail length (1219mm)	26.1	26.1	26.1	26.1
Watts per foot (305mm)	6.6	6.6	6.6	6.6
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

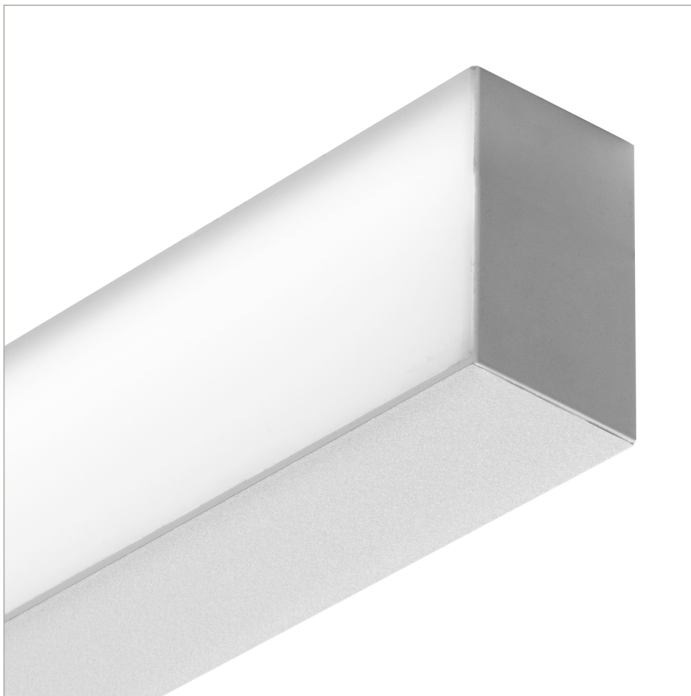

IES Report




ZipTwo® | 707 | Square 3554, Single Side Diffuse | 80 CRI | HO

707-Z2-4-48-XX-XX-X-0-Z-HO-35-JA-X-WH-0

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	105	109	111	111
Total Lumens, 4' rail length (1219mm)	4143	4274	4361	4361
Lumens per foot (305mm)	1036	1068	1090	1090
Input Power (W), 4' rail length (1219mm)	39.6	39.6	39.6	39.6
Watts per foot (305mm)	9.9	9.9	9.9	9.9
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

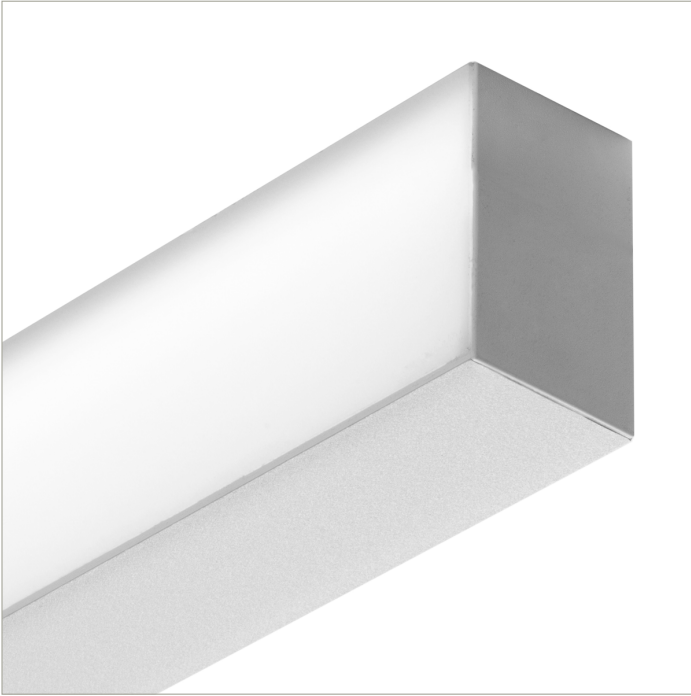

IES Report




ZipTwo® | 707 | Square 3554, Single Side Diffuse | 90 CRI | LO

707-Z2-4-48-XX-XX-X-0-Z-LO-359-JA-X-WH-0

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	80	83	85	86
Total Lumens, 4' rail length (1219mm)	1191	1228	1253	1266
Lumens per foot (305mm)	298	307	313	316
Input Power (W), 4' rail length (1219mm)	14.9	14.9	14.9	14.9
Watts per foot (305mm)	3.8	3.8	3.8	3.8
CRI	95	95	95	95

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

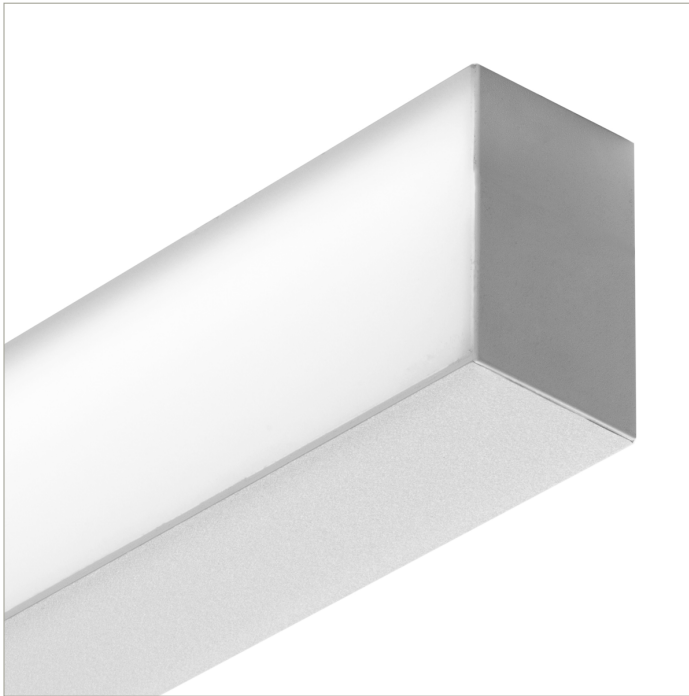

IES Report




ZipTwo® | 707 | Square 3554, Single Side Diffuse | 90 CRI | SO

707-Z2-4-48-XX-XX-X-0-Z-SO-359-JA-X-WH-0

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	91	94	96	97
Total Lumens, 4' rail length (1219mm)	2381	2456	2506	2531
Lumens per foot (305mm)	595	614	627	633
Input Power (W), 4' rail length (1219mm)	26.2	26.2	26.2	26.2
Watts per foot (305mm)	6.6	6.6	6.6	6.6
CRI	95	95	95	95

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

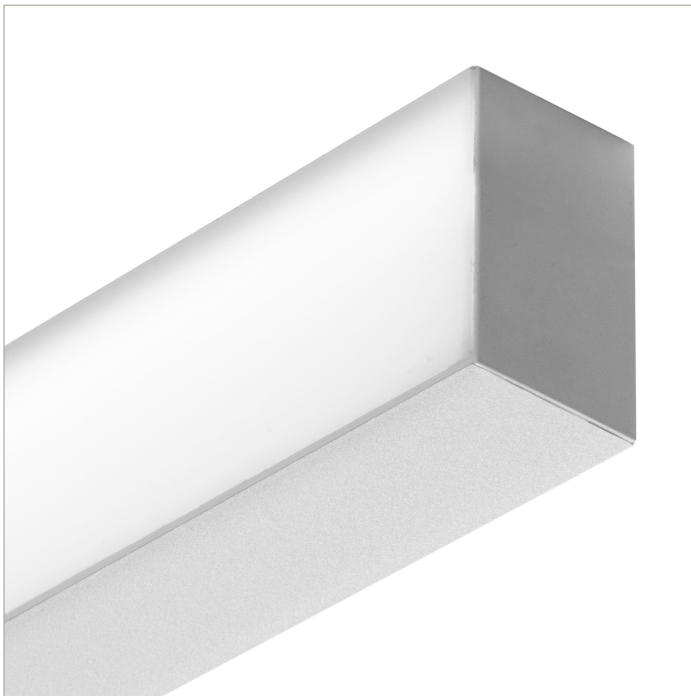

IES Report

ZipTwo® | 707 | Square 3554, Single Side Diffuse | 90 CRI | HO

707-Z2-4-48-XX-XX-X-0-Z-HO-359-JA-X-WH-0

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	91	94	96	97
Total Lumens, 4' rail length (1219mm)	3572	3684	3760	3797
Lumens per foot (305mm)	893	921	940	949
Input Power (W), 4' rail length (1219mm)	39.6	39.6	39.6	39.6
Watts per foot (305mm)	9.9	9.9	9.9	9.9
CRI	95	95	95	95

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).