

## IES Report

**BoxRail® | 207 | 120° Flying, down | 80 CRI | HO**

**207-BX-XX-4-48-XX-XX-XX-X-X-Z-HO-35-G2-X-BL-X**

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	114	117	120	120
Total Lumens, 4' rail length (1219mm)	5849	6034	6157	6157
Lumens per foot (305mm)	1462	1508	1539	1539
Input Power (W), 4' rail length (1219mm)	51.6	51.6	51.6	51.6
Watts per foot (305mm)	12.9	12.9	12.9	12.9
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).



## IES INDOOR REPORT

PHOTOMETRIC FILENAME : VODE\_207\_BX\_HO\_35\_G2\_BL.IES

### DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002

[TEST] L022010914 (SOURCE REPORT FOR REFERENCE)

[TESTLAB] REPORT BASED ON DATA FROM NVLAP ACCREDITED LAB

[ISSUE DATE] 12/23/2019

[MANUFAC] Vode Lighting

[LUMCAT] 207-BX-48-Z-HO-35-G2-BL

[LUMINAIRE] BoxRail LED, 48", 3500K, 80 CRI, zipper board,

[MORE] 120° flywing lens down, high output, black anodized finish

[TEST PROCEDURE] IESNA:LM-79-08

### CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	6146
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	119
Total Luminaire Watts	51.57
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	1.66
Spacing Criterion (90-270)	1.18
Spacing Criterion (Diagonal)	1.56
Basic Luminous Shape	Rectangular w/Sides
Luminous Length (0-180)	0.08 ft
Luminous Width (90-270)	4.00 ft
Luminous Height	0.09 ft

### LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	42523	44019	52637
55	30988	34920	50154
65	18486	22085	45535
75	5665	9171	34748
85	452	859	12274

**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : VODE\_207\_BX\_HO\_35\_G2\_BL.IES**

**CANDELA TABULATION**

	<u>0</u>	<u>5</u>	<u>10</u>	<u>15</u>	<u>20</u>	<u>25</u>	<u>30</u>	<u>35</u>	<u>40</u>	<u>45</u>
<b>0</b>	1936.704	1936.704	1936.704	1936.704	1936.704	1936.704	1936.704	1936.704	1936.704	1936.704
<b>5</b>	1963.258	1961.762	1960.244	1957.978	1955.888	1953.666	1951.356	1948.936	1946.450	1943.920
<b>10</b>	2037.574	2034.406	2029.434	2023.736	2016.982	2009.260	2000.570	1986.886	1972.894	1958.528
<b>15</b>	2138.818	2134.022	2125.684	2115.652	2102.034	2080.540	2057.462	2032.998	2007.346	1977.140
<b>20</b>	2231.768	2225.564	2215.114	2200.308	2175.140	2147.552	2116.202	2077.130	2037.024	1995.444
<b>25</b>	2287.450	2279.706	2269.740	2247.806	2222.000	2188.450	2148.938	2108.348	2051.588	1992.562
<b>30</b>	2282.654	2276.252	2265.956	2244.550	2218.128	2185.480	2147.596	2094.708	2033.966	1967.020
<b>35</b>	2216.654	2209.548	2197.954	2182.444	2157.430	2129.600	2096.622	2037.662	1979.626	1908.874
<b>40</b>	2085.336	2080.980	2070.640	2056.252	2039.642	2020.546	1981.804	1935.912	1883.420	1811.062
<b>45</b>	1901.306	1898.094	1890.438	1880.164	1867.382	1853.082	1821.380	1791.064	1733.424	1677.742
<b>50</b>	1658.426	1653.872	1649.274	1646.612	1646.414	1637.834	1618.892	1593.020	1549.064	1491.776
<b>55</b>	1378.674	1377.134	1378.410	1378.080	1368.136	1355.024	1349.084	1333.376	1314.720	1286.670
<b>60</b>	1091.178	1088.648	1083.522	1064.932	1056.418	1050.852	1052.040	1048.058	1040.930	1023.330
<b>65</b>	793.342	789.294	753.962	747.538	754.908	763.224	771.254	769.340	765.336	761.024
<b>70</b>	475.970	457.600	447.744	458.964	477.422	489.632	496.936	505.846	514.734	517.066
<b>75</b>	226.820	208.978	227.942	235.246	241.142	249.172	254.408	258.192	274.208	284.504
<b>80</b>	54.032	66.770	64.570	68.816	72.138	78.210	84.216	94.028	101.838	117.832
<b>85</b>	16.236	19.272	18.172	17.776	17.490	17.952	16.808	17.644	19.492	22.902
<b>90</b>	15.312	15.576	15.576	15.488	15.488	15.312	15.114	14.564	13.750	12.826

**Vert. Angles**      **Horizontal Angles**

	<u>50</u>	<u>55</u>	<u>60</u>	<u>65</u>	<u>70</u>	<u>75</u>	<u>80</u>	<u>85</u>	<u>90</u>
<b>0</b>	1936.704	1936.704	1936.704	1936.704	1936.704	1936.704	1936.704	1936.704	1936.704
<b>5</b>	1941.368	1938.794	1936.220	1933.690	1931.204	1928.762	1926.298	1924.098	1921.964
<b>10</b>	1943.942	1929.202	1914.704	1907.356	1900.492	1894.112	1888.238	1882.782	1878.250
<b>15</b>	1947.924	1922.272	1897.170	1872.794	1848.836	1837.176	1827.056	1817.926	1810.930
<b>20</b>	1950.278	1902.648	1856.844	1821.490	1788.292	1756.920	1742.642	1730.542	1722.226
<b>25</b>	1933.712	1871.408	1809.984	1751.596	1707.354	1668.282	1639.462	1624.524	1615.086
<b>30</b>	1893.914	1818.652	1744.402	1674.772	1610.818	1566.114	1526.514	1510.278	1500.752
<b>35</b>	1826.902	1745.678	1658.646	1578.764	1508.012	1452.682	1410.926	1388.794	1376.452
<b>40</b>	1731.796	1640.386	1551.176	1464.232	1391.390	1331.044	1290.256	1264.868	1252.174
<b>45</b>	1591.700	1509.288	1420.980	1336.302	1263.350	1205.182	1167.364	1143.692	1132.472
<b>50</b>	1425.908	1347.170	1266.738	1190.574	1123.166	1074.634	1040.798	1018.842	1007.820
<b>55</b>	1223.816	1159.334	1094.808	1027.378	974.292	933.086	903.584	887.436	883.520
<b>60</b>	995.170	954.426	898.986	846.340	805.948	776.116	756.404	744.172	739.508
<b>65</b>	751.058	724.284	691.856	664.664	642.048	623.392	612.172	603.372	600.270
<b>70</b>	515.196	509.212	498.080	484.638	473.352	460.174	452.584	448.910	446.094
<b>75</b>	295.042	307.142	308.066	301.224	297.924	296.362	288.266	285.362	290.092
<b>80</b>	119.482	129.866	137.896	150.788	164.956	165.022	161.964	159.170	159.522
<b>85</b>	25.872	26.620	28.138	32.406	34.650	36.938	38.038	39.006	40.018
<b>90</b>	11.814	10.692	9.592	8.492	7.370	6.270	5.346	5.082	5.346

**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : VODE\_207\_BX\_HO\_35\_G2\_BL.IES**

**ZONAL LUMEN SUMMARY**

Zone	Lumens	%Lamp	%Fixt
0-20	745.82	N.A.	12.10
0-30	1653.7	N.A.	26.90
0-40	2807.16	N.A.	45.70
0-60	5088.7	N.A.	82.80
0-80	6097.69	N.A.	99.20
0-90	6145.59	N.A.	100.00
10-90	5959.62	N.A.	97.00
20-40	2061.34	N.A.	33.50
20-50	3281.08	N.A.	53.40
40-70	2991.09	N.A.	48.70
60-80	1008.99	N.A.	16.40
70-80	299.44	N.A.	4.90
80-90	47.89	N.A.	0.80
90-110	0.00	N.A.	0.00
90-120	0.00	N.A.	0.00
90-130	0.00	N.A.	0.00
90-150	0.00	N.A.	0.00
90-180	0.00	N.A.	0.00
110-180	0.00	N.A.	0.00
0-180	6145.59	N.A.	100.00

Total Luminaire Efficiency = N.A. %

**ZONAL LUMEN SUMMARY**

Zone	Lumens
0-10	185.97
10-20	559.85
20-30	907.87
30-40	1153.47
40-50	1219.74
50-60	1061.8
60-70	709.56
70-80	299.44
80-90	47.89
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00


**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : VODE\_207\_BX\_HO\_35\_G2\_BL.IES**

**COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD**

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	109	105	101	97	107	103	99	96	99	96	93	95	92	90	91	89	87	85
2	100	92	85	80	97	90	84	79	86	81	77	83	79	75	80	77	74	71
3	91	81	73	66	89	79	72	66	76	70	65	73	68	64	71	66	62	60
4	83	71	63	56	81	70	62	56	68	61	55	65	59	54	63	58	54	51
5	76	64	55	48	74	63	54	48	61	53	48	59	52	47	57	51	46	44
6	71	57	48	42	69	56	48	42	55	47	41	53	46	41	51	45	41	39
7	65	52	43	37	64	51	43	37	49	42	37	48	41	36	47	41	36	34
8	61	47	39	33	59	46	38	33	45	38	33	44	37	32	43	37	32	30
9	57	43	35	29	55	43	35	29	41	34	29	40	34	29	39	33	29	27
10	53	40	32	27	52	39	32	26	38	31	26	37	31	26	36	30	26	24

POLAR GRAPH

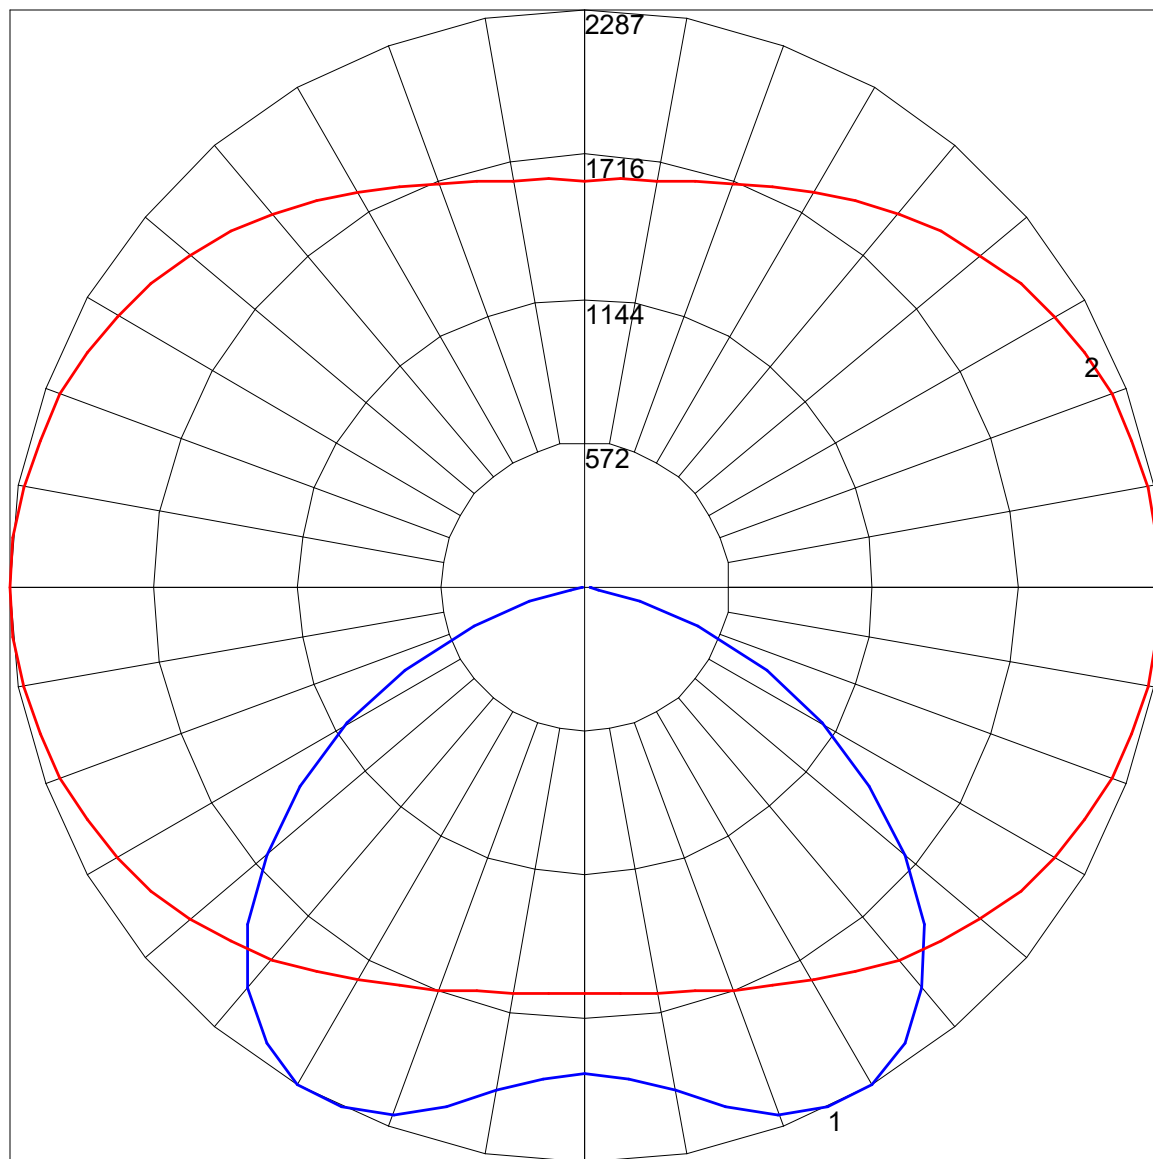

Maximum Candela = 2287.45 Located At Horizontal Angle = 0, Vertical Angle = 25

# 1 - Vertical Plane Through Horizontal Angles (0 - 180)

# 2 - Horizontal Cone Through Vertical Angle (25) (Through Max. Cd.)