

IES Report

BoxRail® | 207 | Black Baffle, down | 80 CRI | HO

207-BX-XX-4-48-XX-XX-XX-X-X-Z-HO-35-BB-X-AL / WH-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	37	38	39	39
Total Lumens, 4' rail length (1219mm)	1894	1954	1994	1994
Lumens per foot (305mm)	474	488	498	498
Input Power (W), 4' rail length (1219mm)	51.6	51.6	51.6	51.6
Watts per foot (305mm)	12.9	12.9	12.9	12.9
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).



IES INDOOR REPORT

PHOTOMETRIC FILENAME : VODE_207_BX_HO_35_BB.IES

DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002

[TEST] L022010905 (SOURCE REPORT FOR REFERENCE)

[TESTLAB] REPORT BASED ON DATA FROM NVLAP ACCREDITED LAB

[ISSUE DATE] 12/23/2019

[MANUFAC] Vode Lighting

[LUMCAT] 207-BX-48-Z-HO-35-BB

[LUMINAIRE] BoxRail LED, 48", 3500K, 80 CRI, zipper board,

[MORE] black baffle w/clear lens down, high output, clear anodized finish

[TEST PROCEDURE] IESNA:LM-79-08

CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	1990
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	39
Total Luminaire Watts	51.57
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	1.28
Spacing Criterion (90-270)	0.60
Spacing Criterion (Diagonal)	0.82
Basic Luminous Shape	Rectangular w/Sides
Luminous Length (0-180)	0.08 ft
Luminous Width (90-270)	4.00 ft
Luminous Height	0.09 ft

LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	1181	2944	2556
55	989	955	1374
65	769	511	668
75	495	425	527
85	490	413	675

IES INDOOR REPORT
PHOTOMETRIC FILENAME : VODE_207_BX_HO_35_BB.IES

CANDELA TABULATION

	<u>0</u>	<u>5</u>	<u>10</u>	<u>15</u>	<u>20</u>	<u>25</u>	<u>30</u>	<u>35</u>	<u>40</u>	<u>45</u>
0	2400.2	2400.2	2400.2	2400.2	2400.2	2400.2	2400.2	2400.2	2400.2	2400.2
5	2389.2	2369.4	2351.8	2334.2	2316.6	2301.2	2283.6	2270.4	2255.0	2244.0
10	2360.6	2323.2	2288.0	2252.8	2219.8	2186.8	2158.2	2107.6	2063.6	2021.8
15	2312.2	2261.6	2213.2	2164.8	2109.8	2030.6	1955.8	1885.4	1819.4	1757.8
20	2246.2	2175.8	2109.8	2037.2	1933.8	1832.6	1738.0	1647.8	1564.2	1485.0
25	2162.6	2079.0	1997.6	1874.4	1746.8	1623.6	1509.2	1401.4	1291.4	1188.0
30	2057.0	1962.4	1852.4	1698.4	1548.8	1408.0	1265.0	1126.4	1001.0	891.0
35	1931.6	1832.6	1685.2	1507.0	1339.8	1170.4	1003.2	855.8	721.6	585.2
40	1174.8	1093.4	976.8	886.6	844.8	829.4	728.2	576.4	418.0	286.0
45	52.8	96.8	180.4	233.2	226.6	195.8	270.6	242.0	176.0	112.2
50	48.4	48.4	46.2	44.0	44.0	52.8	50.6	59.4	61.6	63.8
55	44.0	44.0	41.8	37.4	35.2	33.0	30.8	30.8	33.0	35.2
60	41.8	39.6	37.4	33.0	28.6	26.4	24.2	22.0	22.0	22.0
65	33.0	33.0	30.8	28.6	24.2	24.2	22.0	19.8	17.6	17.6
70	26.4	26.4	24.2	24.2	22.0	19.8	19.8	17.6	15.4	15.4
75	19.8	19.8	22.0	19.8	17.6	17.6	15.4	15.4	13.2	13.2
80	22.0	22.0	19.8	19.8	17.6	17.6	15.4	13.2	13.2	11.0
85	17.6	19.8	19.8	19.8	17.6	17.6	15.4	15.4	13.2	11.0
90	13.2	13.2	13.2	11.0	11.0	11.0	11.0	11.0	8.8	8.8

Vert. Angles **Horizontal Angles**

	<u>50</u>	<u>55</u>	<u>60</u>	<u>65</u>	<u>70</u>	<u>75</u>	<u>80</u>	<u>85</u>	<u>90</u>
0	2400.2	2400.2	2400.2	2400.2	2400.2	2400.2	2400.2	2400.2	2400.2
5	2233.0	2222.0	2213.2	2206.6	2202.2	2197.8	2195.6	2195.6	2195.6
10	1986.6	1953.6	1925.0	1898.6	1878.8	1863.4	1852.4	1845.8	1845.8
15	1702.8	1652.2	1608.2	1573.0	1544.4	1520.2	1502.6	1491.6	1493.8
20	1408.0	1335.4	1271.6	1221.0	1181.4	1150.6	1126.4	1108.8	1106.6
25	1095.6	1012.0	937.2	875.6	827.2	787.6	759.0	739.2	734.8
30	785.4	686.4	596.2	514.8	448.8	393.8	354.2	330.0	330.0
35	455.4	336.6	275.0	226.6	189.2	158.4	132.0	116.6	110.0
40	217.8	145.2	112.2	103.4	94.6	88.0	83.6	79.2	77.0
45	105.6	90.2	79.2	72.6	66.0	61.6	57.2	55.0	55.0
50	63.8	59.4	55.0	50.6	46.2	41.8	39.6	37.4	37.4
55	37.4	37.4	35.2	33.0	30.8	28.6	26.4	24.2	24.2
60	24.2	24.2	24.2	22.0	19.8	17.6	17.6	15.4	15.4
65	17.6	15.4	15.4	15.4	13.2	13.2	11.0	11.0	8.8
70	13.2	13.2	11.0	11.0	11.0	8.8	8.8	6.6	6.6
75	11.0	11.0	8.8	8.8	8.8	6.6	6.6	4.4	4.4
80	11.0	8.8	8.8	6.6	6.6	6.6	4.4	4.4	2.2
85	11.0	8.8	8.8	6.6	4.4	4.4	4.4	2.2	2.2
90	6.6	6.6	6.6	4.4	4.4	4.4	4.4	2.2	2.2

IES INDOOR REPORT
PHOTOMETRIC FILENAME : VODE_207_BX_HO_35_BB.IES

ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixt
0-20	717.34	N.A.	36.00
0-30	1305.66	N.A.	65.60
0-40	1766.81	N.A.	88.80
0-60	1944.21	N.A.	97.70
0-80	1978.17	N.A.	99.40
0-90	1990.07	N.A.	100.00
10-90	1780.1	N.A.	89.40
20-40	1049.47	N.A.	52.70
20-50	1194.99	N.A.	60.00
40-70	197.15	N.A.	9.90
60-80	33.96	N.A.	1.70
70-80	14.21	N.A.	0.70
80-90	11.90	N.A.	0.60
90-110	0.00	N.A.	0.00
90-120	0.00	N.A.	0.00
90-130	0.00	N.A.	0.00
90-150	0.00	N.A.	0.00
90-180	0.00	N.A.	0.00
110-180	0.00	N.A.	0.00
0-180	1990.07	N.A.	100.00

Total Luminaire Efficiency = N.A. %

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	209.96
10-20	507.37
20-30	588.33
30-40	461.15
40-50	145.52
50-60	31.89
60-70	19.74
70-80	14.21
80-90	11.90
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00


IES INDOOR REPORT
PHOTOMETRIC FILENAME : VODE_207_BX_HO_35_BB.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	113	110	107	105	111	108	105	103	104	102	100	100	98	97	97	95	94	92
2	107	102	98	94	105	100	96	93	97	94	91	94	91	89	91	89	87	85
3	101	95	89	85	99	93	88	84	91	86	83	88	85	82	86	83	81	79
4	96	88	82	78	94	87	82	77	85	80	76	83	79	76	81	77	75	73
5	91	82	76	72	89	81	76	71	79	74	71	78	73	70	76	72	69	68
6	86	77	71	66	85	76	70	66	75	69	66	73	69	65	72	68	65	63
7	82	72	66	62	80	71	66	61	70	65	61	69	64	61	68	64	60	59
8	78	68	62	57	76	67	61	57	66	61	57	65	60	57	64	60	57	55
9	74	64	58	54	73	63	58	54	62	57	53	62	57	53	61	56	53	52
10	70	60	54	50	69	60	54	50	59	54	50	58	53	50	58	53	50	49

POLAR GRAPH

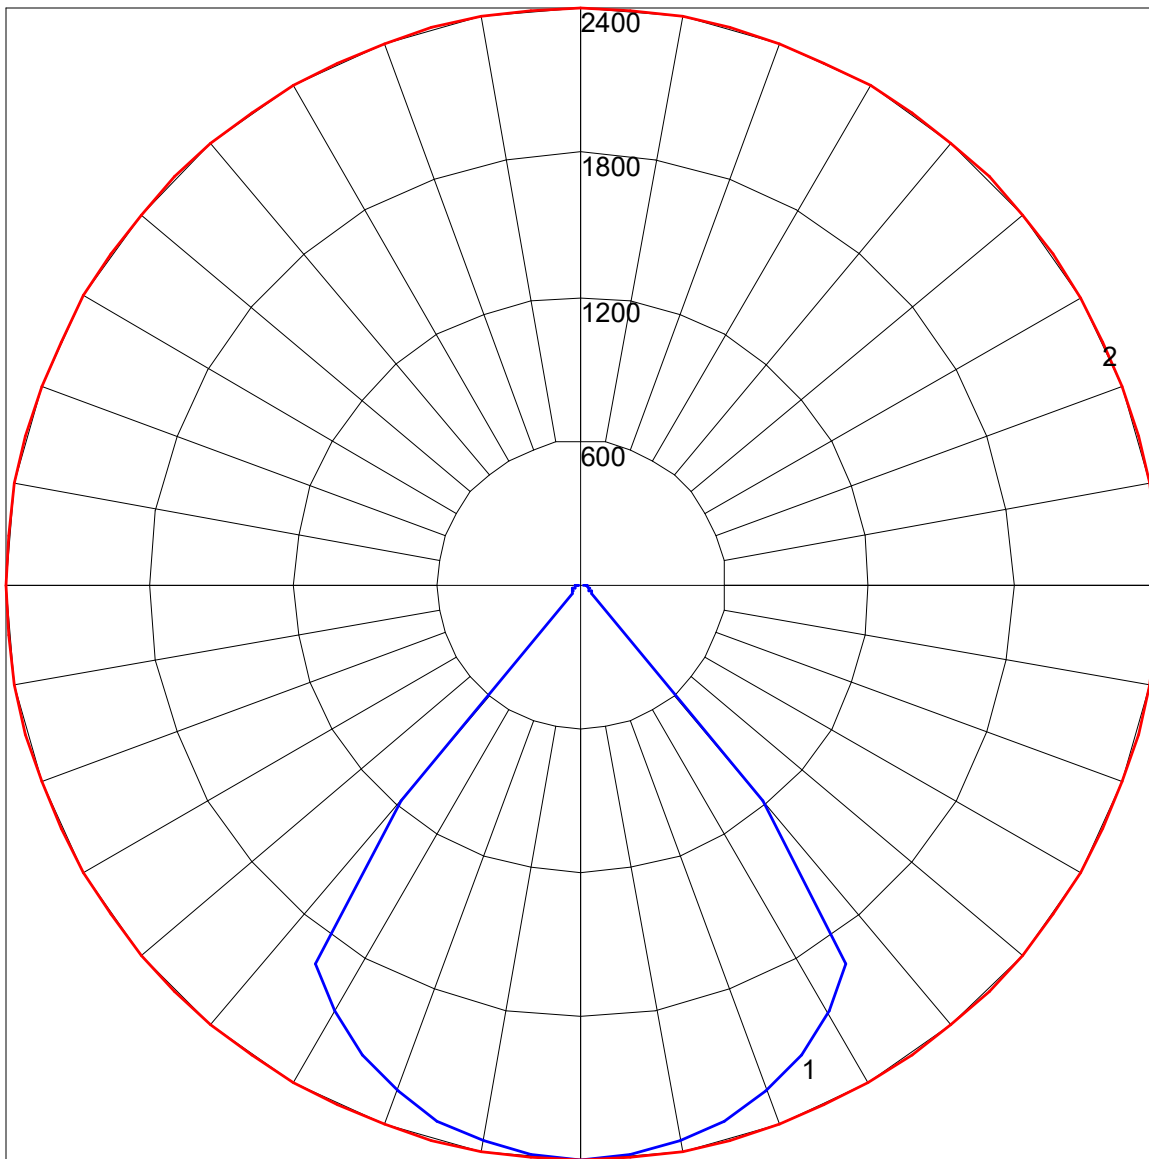

Maximum Candela = 2400.2 Located At Horizontal Angle = 0, Vertical Angle = 0
1 - Vertical Plane Through Horizontal Angles (0 - 180)
2 - Horizontal Cone Through Vertical Angle (0) (Through Max. Cd.)