
Adaptive architectural lighting systems


## Two Conductor Wire Harness


## For use with all Vode Systems

Low voltage wire harness connects driver to rail. Wire hareness is 25' (7.6m) 18/2 AWG stranded wire with provided micro fit molex connectors on either end for quick and easy installation. Multiple haresses can be combined for a total length of up to 100' (30.5m). Refer to Vode Power Guide for max remote distance based on power selection.

Technical Support: 707-996-9898 or technicalsupport@vode.com





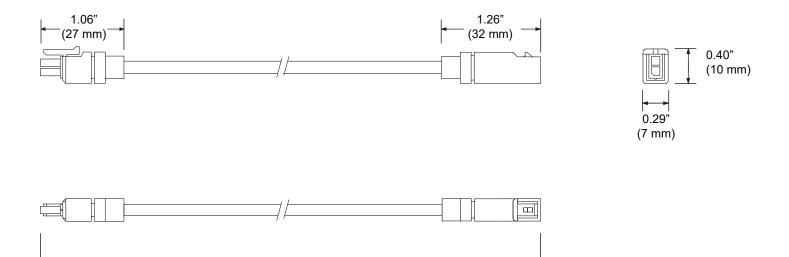

25' (7620 mm)

## PART NUMBER WRH-MWP-XX-MF-18/2-RLF-YY

DESCRIPTION All systems, flat cable –18/2 AWG, plenum (CMP) rated, connectors, clear nylon housings, Red List Free – black (BJ) or white jacket (WJ)