

Spec Guide

ZipTwo® | Square 5020 | 707

Direct lighting for open office and ambient applications.



Square 5020, Critical Edge, white

Benefits & Features

Minimal Profile, Robust Design

Rectangular profile. 2" (51mm) x .75" (19mm).

Superior Light Quality & Performance

IES information coming soon. 80 & 90 CRI & tunable white (2200-5000K) available.

Versatile Mounting, Easy Installation

Magnet with tape-on metal strip or low profile clip allow for mounting to almost any surface or T-Bar ceiling.

Floating Plane of Light

Clean lines created by Critical Edge™ optic and a wide luminous surface without diode image.



Square 5020, Critical Edge, black

Build Your Specification

707-Z2	SL				0 >>
--------	----	--	--	--	------

System & Rail Type	System Type	System Length	Rail Length	Mounting	Arm/Cord Length
707-Z2 ZipTwo	SL Standard Linear	Specify overall system length in ft/in or M/mm. <i>Corners and Shapes Available. See Corners and Shapes Guide for more details.</i>	24 24" (610mm) 36 36" (914mm) 48 48" (1219mm) 60 60" (1524mm) 72 72" (1829mm) 96 96" (2438mm) 108 108" (2743mm) 120 120" (3048mm) 132 132" (3352mm) 144 144" (3658mm) ZZ Other rail length or layout (please specify) <i>See Rail Length Chart for more details</i>	C Clip CM Clip with Micro J-Box T Magnet with Tape-On Metal Strip T1 9/16" T-Bar Clip, low profile T2 15/16" T-Bar Clip, low profile T3 15/16" T-Bar Clip, medium profile T4 15/16" T-Bar Clip, concealed T5 9/16" T-Bar Clip, medium profile T6 Slotted T-Bar Clip T7 Dimensional T-Bar Clip SC Strut Channel Clip DM Armstrong DynaMax ZZ Other (please specify)	0 None

>>				Z >>
----	--	--	--	------

Power Location	Power Type	Voltage	Emergency Power	LED Type
Remote Power RP25 25' (7.62m) Wire Harness RP50 50' (15.24m) Wire Harness RP75 75' (22.86m) Wire Harness RP100 100' (30.48m) Wire Harness	Flexible 1 to 1 Power AE eldoLED 0-10v, 1.0% Dimming AT eldoLED 0-10v, 0.1% Dimming AD eldoLED DALI, 0.1% Dimming AX eldoLED DMX, 100-0% Dimming AH Hi-lume 1% EcoSystem, Soft On / Fade to Black Technology, LDE1 AH2 Hi-lume 1% 2-wire LTEA2W (120V forward phase only) Optimized Power AEO eldoLED 0-10v, 1.0% Dimming ATO eldoLED 0-10v, 0.1% Dimming ADO eldoLED DALI, 0.1% Dimming AXO eldoLED DMX, 100-0% Dimming ZZ Other (please specify) <i>*See Power Guide for driver features & limitations.</i>	1 120v 2 120v-277v X Not Yet Specified	0 No Emergency Power ZZ Emergency Power (<i>specify requirements</i>)	Z Zipper Board™ ZZ Zipper Board™

>>			
----	--	--	--

Lumen Output	Color Temperature	Optics	Sensors
LO Low Output SO Standard Output HO High Output* ZZ Other (please specify) <i>See IES Files page for details.</i> <i>*See Power Guide for driver features & limitations.</i>	80+ CRI 27 2700K 30 3000K 35 3500K 40 4000K 90+ CRI 279 2700K 309 3000K 359 3500K 409 4000K ZZ Tunable White Available <i>See Guide for details</i>	W5 Square 5020, Critical Edge	0 None ZZ Other (please specify)*

>>	
----	--

Finish	Options
WH White BL Black	0 None 9 9' 18/3 Cord and Plug CP Contact factory for Chicago Plenum

NOTES & LIMITATIONS

*Sensors available. Contact [Vode](#) for more information.

5 Year Limited Warranty. See full Vode warranty description [here](#) or at [vode.com](#).

Listed to UL standards for damp location by a Nationally Recognized Testing Laboratory (NRTL) recognized by OSHA.



Applications

General Interior and Open Office



Square 5020, Critical Edge



Square 5020, Critical Edge

Structure

Rail Lengths	24" (610mm) - 144" (3658mm) See Rail Length Chart for more details.
Rail Dimensions	2" (51mm) x .75" (19mm). See dimensions section for details.
Construction	Extruded and machined 6063 aluminum.
Mounting	Clip, Clip with Micro J-Box, Magnet with Tape-On Metal Strip, T-Bar Clips for most grid/panel construction, Strut Channel Clip.
Run Length	24" (610mm) minimum. Rail lengths may be installed end-to-end to any length.
Operating Temperature	32°F to 104°F (0°C to 40°C).
Humidity	0-95%, non-condensing. Suitable for damp locations.
System Weight	Coming Soon

Materials


LED Board Construction	Aluminum core PCB, black LCP connectors, RoHS compliant.
Lens	High-impact extruded acrylic glass (PMMA).
Power Cable	Ø3mm, 33/2 AWG, Plenum (CMP) rated semi-rigid PVC or FEP, flame tested UL-910, red list free.
Cable Connectors	Unfilled black nylon, rated UL 94 V-0, halogen free, PVC or FEP overmold, RoHS compliant, red list free.
Remote Linear Power Housing (RLP)	20.7" x 2.375" x 2.53", 0.054" formed Galvanized Steel.
Remote Brick Power Housing (RBP)	4.32" x 3.37" x .078" Galvanized Steel mounting plate.

Power and Controls

Power Type	Class 2 (<60v output) constant current driver
Dimming Controls	Dimming (0.1%, 1%), 0-10v, DALI, DMX, Lutron Hi-Lume 1% are available. See Power Guide for details.
Input Voltage	120v - 277v, 50/60hz
Power Location	Remote power. Maximum remote distance up to 100' (30.5m) depending on driver selection. See Power Guide for details.


Remote power is locating the power supply away from the fixture. Remote power comes in two housing styles: brick style and linear style. Consult [Power Guide](#) to determine which type you will receive.

Remote Brick Power Housing

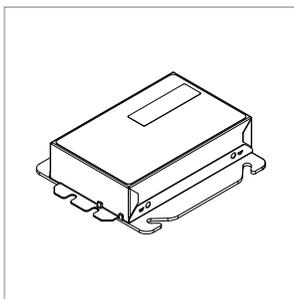


Supplied for some remote power applications. One remote power supply housing is supplied for each rail. Provided driver mounting plate fits standard 4" metal, square J-Boxes with a minimum volume of 21 in³ (J-Box not provided). See [Tech Sheet](#) for details.

Remote Linear Power Housing

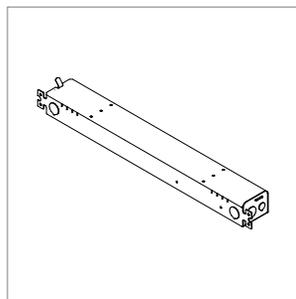

One remote power supply housing is supplied with each power supply. All Vode linear remote drivers come in a 0.054" (0.8mm) formed galvanized steel power supply housing with five (5) knockouts: (4) 1-1/8", (1) 7/8" and (1) 9/16". Accommodates standard linear power supplies. See [Tech Sheet](#) for details.

Wire Harness

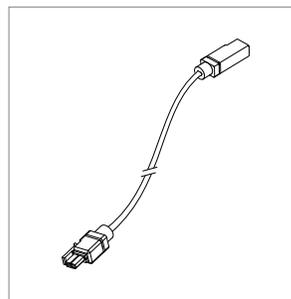


Wire harness connects driver to rail. Wire harness is 25' (7.6m) with micro fit molex connectors for quick and easy installation. Multiple harnesses can be combined for a total length of up to 100' (30.5m). See [Tech Sheet](#) for details.

Power and Controls

Flexible 1 to 1 power


For Flexible 1 to 1 Power, Vode supplies one single output driver per fixture, allowing each fixture to be controlled independently. Direct/Indirect fixtures are supplied with two single output drivers, allowing the direct and indirect lighting to be controlled independently. Consult [Power Guide](#) to determine which type you will receive.

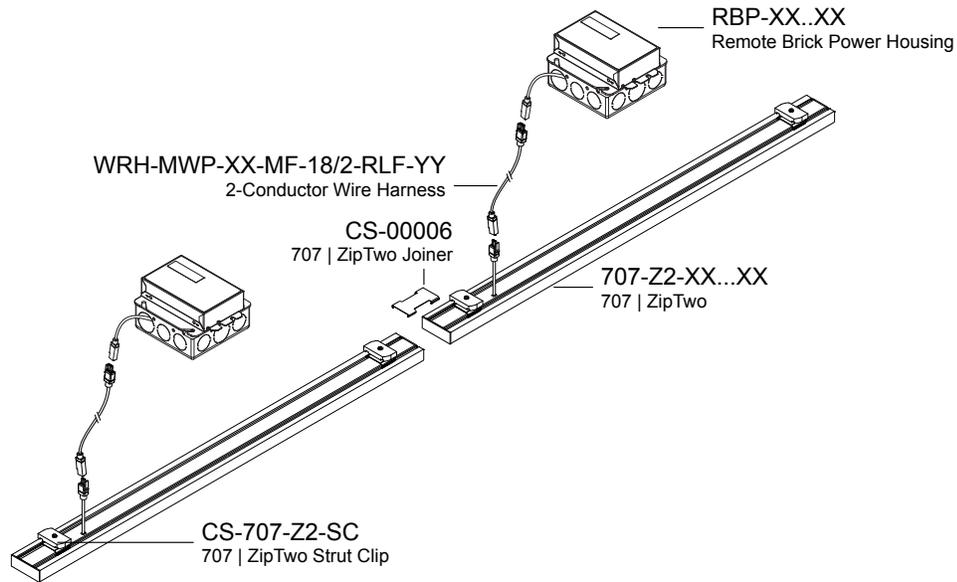

Optimized Power

To optimize power, Vode configures specifications with drivers that have 2 or 4 outputs. Depending on system configurations and power requirements, up to 4 fixtures can be powered from a 4-output driver. Consult [Power Guide](#) to determine which type you will receive.

IMPORTANT: Each fixture will still require individual wire harnesses, as shown below.

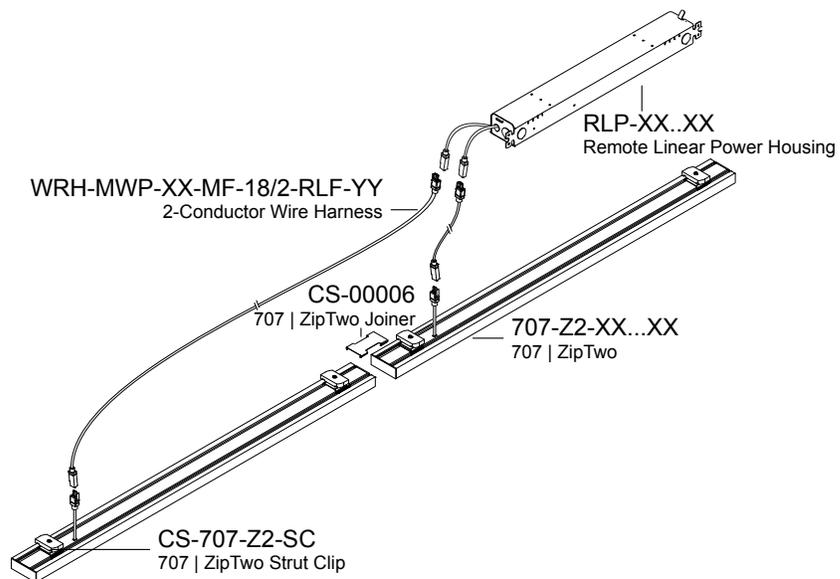


Note: Drawings not to scale, for reference only.

Power and Controls


Wire Harness

Low voltage wire harness connects driver to rail. Wire harness is 25' (7.6m) 18/2 AWG stranded wire with provided micro fit molex connectors on either end for quick and easy installation. Multiple harnesses can be combined for a total length of up to 100' (30.5m). Refer to Vode Power Guide for max remote distance based on power selection. Consult [Power Guide](#) to determine which type you will receive.

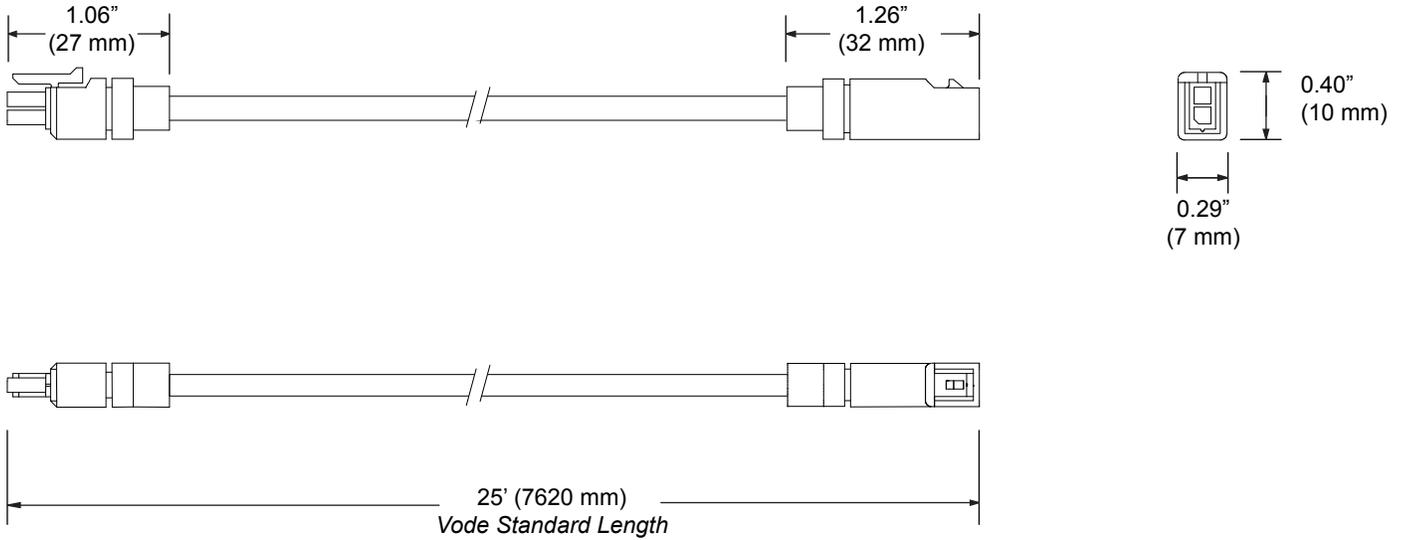


Note: Drawings not to scale, for reference only.

Dimensions

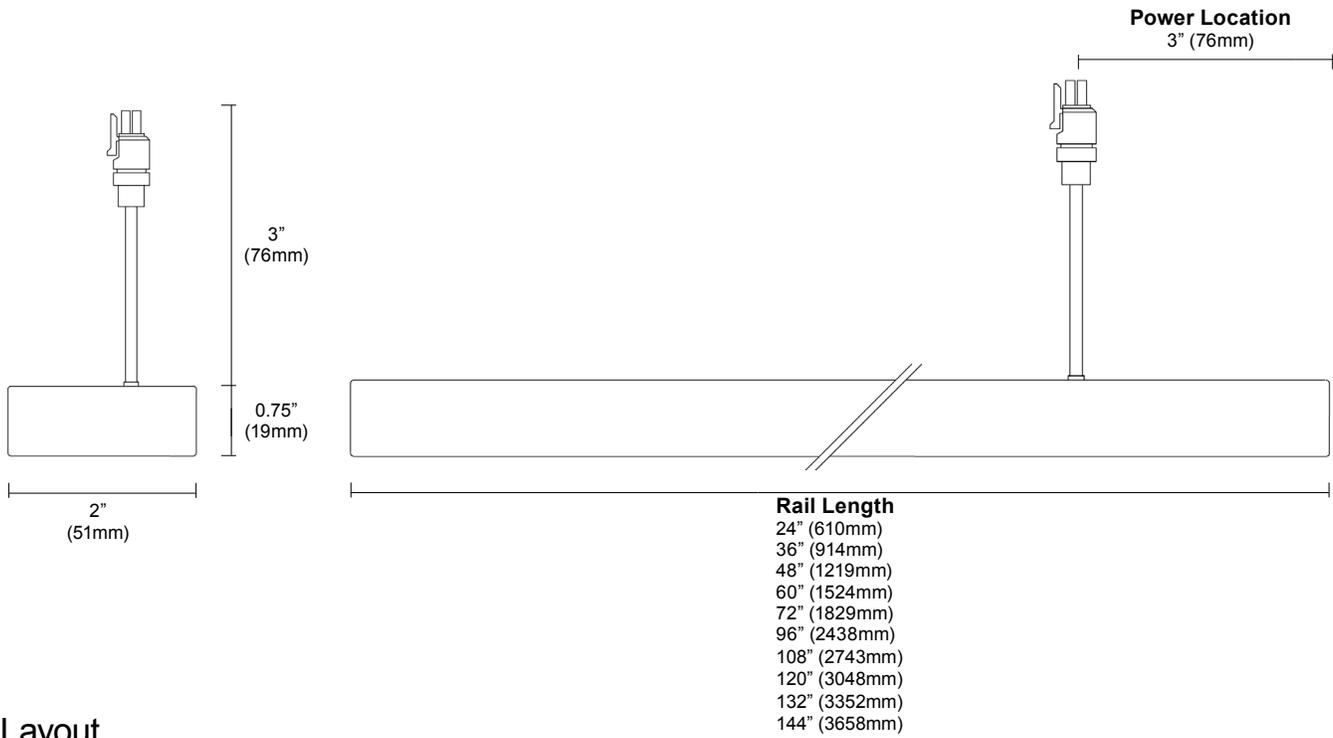


Layout

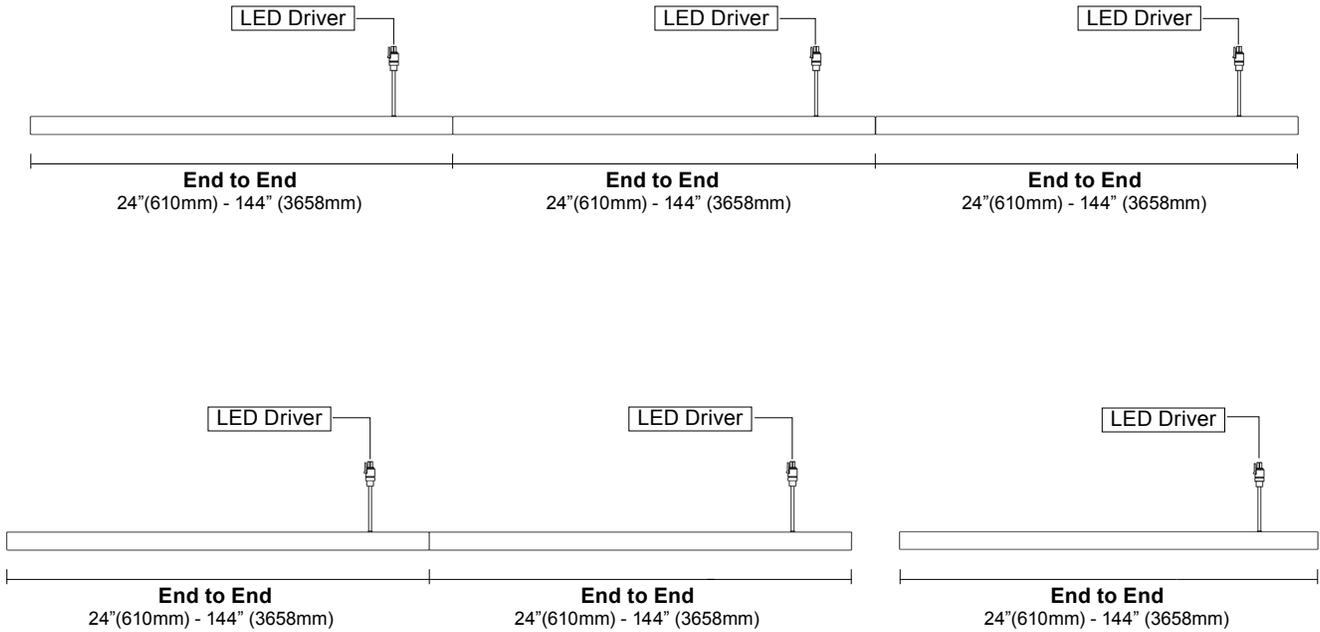


Corner and Shapes Available (Square, Rectangle, L-Shape, U-Shape, ZigZag)

[See Guide](#) for details


Mounting Options

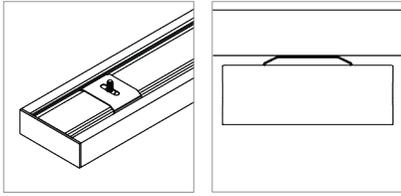


Clip (C)

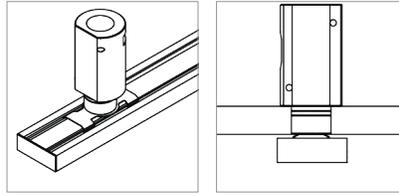


Clip with Micro J-Box (CM)

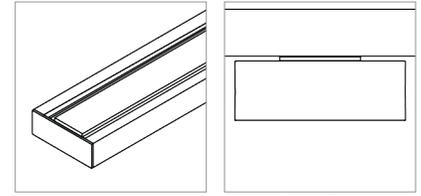


Magnet with Tape-On Metal Strip (T)

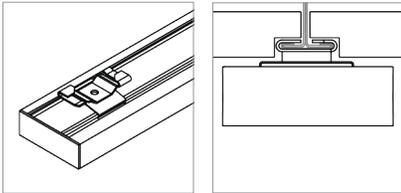


9/16" T-Bar Clip, low profile (T1)

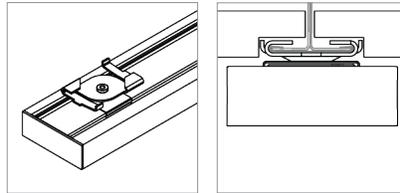


15/16" T-Bar Clip, low profile (T2)

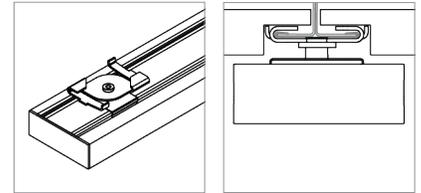


15/16" T-Bar Clip, medium profile (T3)

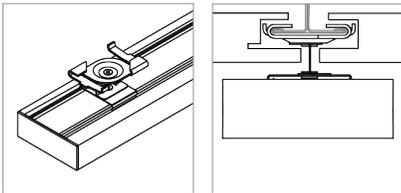


15/16" T-Bar Clip, concealed (T4)

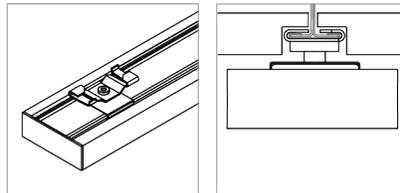


9/16" T-Bar Clip, medium profile (T5)

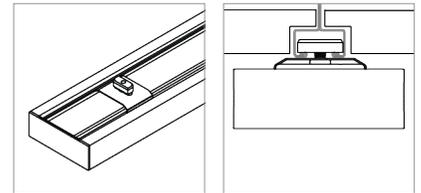


Slotted T-Bar Clip (T6)

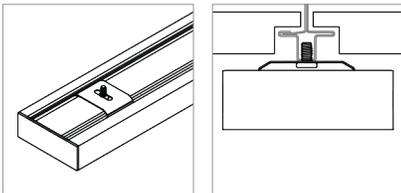

Dimensional T-Bar Clip (T7)

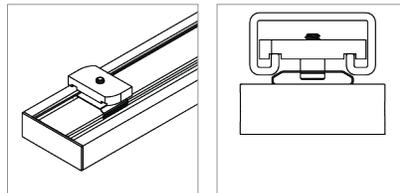

Strut Channel Clip (SC)

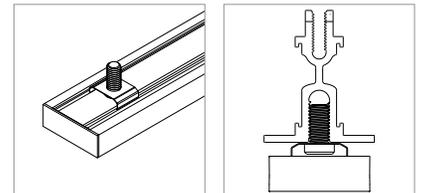


Armstrong DynaMax (DM)

See [ZipTwo Clip Guide](#) to check compatibility.

Performance | Zipper LED

Zipper Board has 72 diodes per foot (305mm). Testing based on a 4' rail section. Lumen measurement complies with IES-LM-79-08 testing procedures.


Square 5020, Critical Edge, white finish (W5-WH)

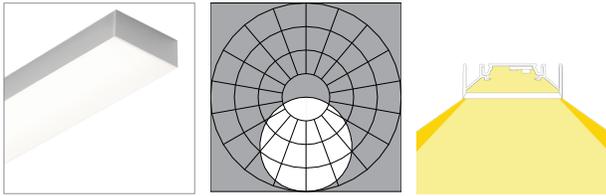

L80 >60,000 hours

	80 CRI (80min., 84 avg.)				90 CRI (90min., 96 avg.)			
	2700K	3000K	3500K	4000K	2700K	3000K	3500K	4000K
Low Output (LO)								
Efficacy - Lumens per Watt	87	90	92	92	75	78	79	80
Lumens per foot (305mm)	323	334	340	340	279	288	294	296
Watts per foot (305mm)	3.8	3.8	3.8	3.8	3.8	3.8	3.8	3.8
Standard Output (SO)								
Efficacy - Lumens per Watt	100	103	105	105	86	89	91	92
Lumens per foot (305mm)	647	667	681	681	558	575	587	593
Watts per foot (305mm)	6.6	6.6	6.6	6.6	6.6	6.6	6.6	6.6
High Output (HO)								
Efficacy - Lumens per Watt	99	102	104	104	85	88	90	90
Lumens per foot (305mm)	970	1001	1021	1021	836	863	881	889
Watts per foot (305mm)	9.9	9.9	9.9	9.9	9.9	9.9	9.9	9.9

Square 5020, Critical Edge, black finish (W5-BL)

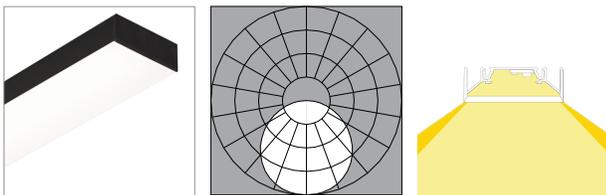

L80 >60,000 hours

	80 CRI (80min., 84 avg.)				90 CRI (90min., 96 avg.)			
	2700K	3000K	3500K	4000K	2700K	3000K	3500K	4000K
Low Output (LO)								
Efficacy - Lumens per Watt	70	72	73	73	60	62	63	64
Lumens per foot (305mm)	257	265	271	271	222	229	233	236
Watts per foot (305mm)	3.8	3.8	3.8	3.8	3.8	3.8	3.8	3.8
Standard Output (SO)								
Efficacy - Lumens per Watt	79	82	83	83	69	71	72	73
Lumens per foot (305mm)	515	531	542	542	444	458	467	472
Watts per foot (305mm)	6.6	6.6	6.6	6.6	6.5	6.5	6.5	6.5
High Output (HO)								
Efficacy - Lumens per Watt	79	81	83	83	68	70	71	72
Lumens per foot (305mm)	772	796	812	812	665	686	700	707
Watts per foot (305mm)	9.9	9.9	9.9	9.9	9.9	9.9	9.9	9.9